

An Algebraic Approach to Physical-Layer Network Coding

Chen Feng, Danilo Silva, and Frank R. Kschischang

Abstract—The problem of designing physical-layer network coding (PNC) schemes via lattice partitions is considered. Building on the compute-and-forward (C&F) relaying strategy of Nazer and Gastpar, who demonstrated its asymptotic gain using information-theoretic tools, an algebraic approach is taken to show its potential in practical, non-asymptotic, settings. A general framework is developed for studying lattice-partition-based PNC schemes—called lattice network coding (LNC) schemes for short—by making a direct connection between C&F and module theory. In particular, a generic LNC scheme is presented that makes no assumptions on the underlying lattice partition. C&F is re-interpreted in this framework, and several generalized constructions of LNC schemes are given based on the generic LNC scheme. Next, the error performance of LNC schemes is analyzed, with a particular focus on hypercube-shaped LNC schemes. The error probability of this class of LNC schemes is related to certain geometric parameters of the underlying lattice partitions, resulting in design criteria both for choosing receiver parameters and for optimizing lattice partitions. These design criteria lead to explicit algorithms for choosing receiver parameters that are closely related to sphere-decoding and lattice-reduction algorithms. These design criteria also lead to several specific methods for optimizing lattice partitions, and examples are provided showing that 3 to 5 dB performance improvement over some baseline LNC schemes is easily obtained with reasonable decoding complexity.

I. INTRODUCTION

A. Physical-layer Network Coding

INTERFERENCE has traditionally been considered harmful in wireless networks. Simultaneous transmissions are usually carefully avoided in order to prevent interference. Interference is, however, nothing but a sum of delayed and attenuated signals, and so may contain useful information. This point of view suggests the use of decoding techniques to process—rather than avoid or discard—interference in wireless networks.

So-called *physical-layer network coding* (PNC) is one such technique. PNC is inspired by the principle of network coding [1] in which intermediate nodes in the network forward *functions* (typically linear combinations [2], [3]) of their (already decoded) incoming packets, rather than the packets themselves. As the terminology suggests, PNC moves this philosophy closer to the channel: rather than attempting to

decode simultaneously received packets individually, intermediate nodes infer *linear combinations* of these packets from the received signal, which are then forwarded. With a sufficient number of such linear combinations, any destination node in the network is able to recover the original message packets.

The basic idea of PNC appears to have been independently proposed by several research groups in 2006: Zhang, Liew, and Lam [4], Popovski and Yomo [5], and Nazer and Gastpar [6]. The scheme of [4] assumes a very simple channel model for intermediate nodes, in which the received signal $\mathbf{y}$ is given as $\mathbf{y} = \mathbf{x}_1 + \mathbf{x}_2 + \mathbf{z}$, where $\mathbf{x}_1$ and $\mathbf{x}_2$ are binary-modulated signals, $\mathbf{z}$ is Gaussian noise, and intermediate nodes attempt to decode the modulo-two sum (XOR) of the transmitted messages. It is shown that this simple strategy significantly improves the throughput of a two-way relay channel. The work of [5] assumes a more general channel model for intermediate nodes, in which $\mathbf{y} = h_1\mathbf{x}_1 + h_2\mathbf{x}_2 + \mathbf{z}$, where h_1 and h_2 are (known) complex-valued channel gains, and intermediate nodes again attempt to decode the XOR of the transmitted messages. This channel model captures the effects of fading and imperfect phase alignment. It is shown that, in a large range of signal-to-noise ratios (SNR), the strategy in [5] outperforms conventional relaying strategies (such as amplify-and-forward and decode-and-forward) for a two-way relay channel.

Due to its simplicity and potential to improve network throughput, PNC has received much research attention since 2006. A large number of strategies for PNC have been proposed, with a particular focus on two-way relay channels. For example, the strategies described in [7], [8] are able to mitigate phase misalignment for the two-way relay channels. This is achieved by generalizing the XOR combination to any binary operation that satisfies the so-called *exclusive law of network coding*. The strategies presented in [9]–[11] are able to approach the capacity of two-way relay channels at high SNRs. This is proved by comparing their achievable rate regions with the cut-set bound. The amplify-and-forward strategy for two-way relay channels has been implemented in a test-bed using software radios [12]. A survey of PNC for two-way relay channels can be found in [13].

B. Compute-and-Forward Relaying

The framework of Nazer and Gastpar [14] moves beyond two-way relay channels. It assumes a Gaussian multiple-access channel (MAC) model for intermediate nodes, in which $\mathbf{y} = \sum_{\ell=1}^L h_{\ell}\mathbf{x}_{\ell} + \mathbf{z}$, where h_{ℓ} are (known) complex-valued channel gains, and $\mathbf{x}_{\ell}$ are points in a multidimensional lattice.

C. Feng and F. R. Kschischang are with the Edward S. Rogers Sr. Department of Electrical and Computer Engineering, University of Toronto, Toronto, Ontario M5S 3G4, Canada, Emails: cfeng@eecg.utoronto.ca, frank@comm.utoronto.ca; D. Silva is with the Department of Electrical Engineering, Federal University of Santa Catarina, Florianópolis, SC, Brazil, Email: danilo.silva@ieee.org.

Submitted to *IEEE Trans. on Information Theory*, July 21, 2011.

Intermediate nodes exploit the property that any integer combination of lattice points is again a lattice point. In the simplest case, an intermediate node selects integers a_ℓ and a complex-valued scalar α , and then attempts to decode the lattice point $\sum_{\ell=1}^L a_\ell \mathbf{x}_\ell$ from

$$\alpha \mathbf{y} = \sum_{\ell=1}^L a_\ell \mathbf{x}_\ell + \underbrace{\sum_{\ell=1}^L (\alpha h_\ell - a_\ell) \mathbf{x}_\ell + \alpha \mathbf{z}}_{\text{effective noise}}.$$

Here a_ℓ and α are carefully chosen so that the “effective noise,” $\sum_{\ell=1}^L (\alpha h_\ell - a_\ell) \mathbf{x}_\ell + \alpha \mathbf{z}$, is made (in some sense) small. The intermediate node then maps the decoded lattice point into a linear combination (over some finite field) of the corresponding messages. This procedure is referred to as the compute-and-forward (C&F) relaying strategy.

The C&F relaying strategy makes no assumption about the network topologies, since the channel model for each intermediate node is quite general. The C&F relaying strategy tolerates phase misalignment well, since intermediate nodes have the freedom to choose a_ℓ and α according to the phase differences among channel gains h_ℓ . To further demonstrate the advantages of C&F strategy, Nazer and Gastpar [14] have established the so-called “computation rate” for a class of one-hop networks and have shown that this strategy outperforms the outage rate of conventional relaying strategies for such simple network topologies.

The computation rate established in [14] is based on the existence of an (infinite) sequence of “good” lattice partitions described in [15]. This sequence of lattice partitions—originally constructed by Erez and Zamir to approach the capacity of AWGN channels—has also been suggested by some other research groups for use in two-way relay channels. For instance, Narayanan, Wilson, and Sprintson [9] proposed a lattice-partition-based scheme for the case of equal channel gains. Subsequently, this scheme was extended to the case of unequal channel gains by Nam, Chung, and Lee [10], and then extended to the case of block-fading by Wilson and Narayanan [16]. All of these schemes are able to approach the corresponding cut-set bounds for two-way relay channels.

The C&F strategy can be enhanced by assuming that transmitters have access to additional side information. For example, it is shown in [17] that a modified version of the C&F strategy achieves all K degrees of freedom for a $K \times K$ MIMO channel; however, this scheme requires global channel-gain information at all transmitters. The C&F strategy can be extended to multi-antenna systems where each node in the network is equipped with multiple antennas [18], [19]. It is shown in [18] that significant gains in the computation rate can be achieved by using multiple antennas at the receiver to steer the channel coefficients towards integer values. A recent survey of the C&F strategy can be found in [20].

In addition to the C&F strategy, we also note that, in some scenarios, it is advantageous to use the Quantize-Map-and-Forward and noisy network coding schemes [21]–[23]. However, all of these schemes require global channel-gain information at all destinations, whereas the (original) C&F strategy only requires local channel-gain information.

C. System Model

Motivated by the advantages of C&F relaying strategy, in this paper we study lattice-partition-based PNC schemes (called lattice network coding schemes for short) in practical, non-asymptotic, settings. In particular, we attempt to construct LNC schemes using practical finite-dimensional lattice partitions rather than the sequence of asymptotically-good lattice partitions; we attempt to construct LNC schemes under a “non-coherent” network model (where destinations have no knowledge of the operations of intermediate nodes) rather than the coherent network model described in [14]. No side information is assumed at the transmitters.

Although our main focus in this paper will be on physical-layer techniques, we will now provide a general network model that provides a context for our approach. We consider wireless networks consisting of any number of nodes. A node is designated as a *source* if it produces one or more original messages and as a *destination* if it demands one or more of these messages. A node may be both a source and a destination, or neither (in which case it is called a *relay*).

We assume that time is slotted and that all transmissions are approximately synchronized (at the symbol and block level, but not at the phase level). We also assume that nodes follow a half-duplex constraint; i.e., at any time slot, a node may either transmit or receive, but not both. Thus, at each time slot, a node may be scheduled as either a transmitter or a receiver (or remain idle).

Nodes communicate through a multiple-access channel subject to block fading and additive white Gaussian noise. At each time slot, the signal observed by a specific receiver is given by

$$\mathbf{y} = \sum_{\ell=1}^L h_\ell \mathbf{x}_\ell + \mathbf{z} \quad (1)$$

where $\mathbf{x}_1, \dots, \mathbf{x}_L \in \mathbb{C}^n$ are the signals transmitted by the current transmitters, $h_1, \dots, h_L \in \mathbb{C}$ are the corresponding channel fading coefficients, and $\mathbf{z} \sim \mathcal{CN}(\mathbf{0}, N_0 \mathbf{I}_n)$ is a circularly-symmetric jointly-Gaussian complex random vector. We assume that the channel coefficients are perfectly known at the receivers but are *unknown* at the transmitters.

Transmitter ℓ is subject to a power constraint given by

$$\frac{1}{n} E [\|\mathbf{x}_\ell\|^2] \leq P_\ell.$$

For simplicity (and without loss of generality), we assume that the power constraint is symmetric ($P_1 = \dots = P_L$) and that any asymmetric power constraints are incorporated by appropriately scaling the coefficients h_ℓ .

Each communication instance consists of some specified number of time slots, in which a number (say, M) of fixed-size messages are produced by the sources and are required to be successfully delivered to their destinations. In this paper, we are interested in a multi-source multicast problem where each destination node demands *all* of the messages produced by *all* of the source nodes. This comprises a single use of the system. If desired, the system may be used again with a new set of messages.

We now present a high-level overview of the proposed three-layer system architecture.

Layer 3 (top): This layer is responsible for scheduling, at each time slot, nodes as transmitters or receivers, as well as deciding on the power allocation. Note that although any node labeled a receiver is potentially listening to all current transmitters, only nodes within transmission range will effectively be able to communicate.

Layer 2 (middle): This layer implements standard (multi-source) random linear network coding over a finite-field or, more generally, over a finite ring (see, Sec. IV). Each node is assumed to have a buffer holding fixed-size packets which are linear combinations of the M original messages. At each time slot, a transmitter node computes a random linear combination of the packets in its buffer and forwards this new packet to the lower layer. At each time slot, a receiver node receives from the upper layer one or more packets which are (supposedly) linear combinations of the M original messages and includes these packets in its buffer. It then performs (some form of) Gaussian elimination in order to discard redundant (linearly dependent) packets and reduce the size of the buffer. Initially, only the source nodes have nonempty buffers, holding the original messages produced at these nodes. When the communication ends, each destination node attempts to recover all the original messages based on the contents of its own buffer. Note that the system is inherently *noncoherent* in the sense of [24], so messages are assumed to be already properly encoded in anticipation of this fact. For instance, each i th original message may include a header that is a length- P unit vector with a 1 in position i ; this ensures that original messages are indeed linearly independent.

Layer 1 (bottom): This layer implements (linear) physical-layer network coding. At each time slot, a transmitter node takes a packet from the upper layer and maps it to a complex vector for transmission over the channel. At each time slot, a receiver node takes a complex received vector from the channel output and decodes it into one or more packets that are forwarded to the upper layer. These packets are required to be linear combinations of the packets transmitted by all the transmitter nodes within range. (By linearity, they will also be linear combinations of the M original messages.) Note, however, that only *linearly independent* linear combinations are useful. A receiver node will try to decode as many linearly independent packets as possible, but obviously the number of packets it is able to decode will depend on channel conditions.

D. Outline of the Paper

In the remainder of the paper, we mainly focus on the communication problem at Layer 1, as it fundamentally sets up the problems to be solved at the higher layers. In Section III, we present a mathematical formulation of linear PNC at Layer 1. We then introduce Nazer-Gastpar's C&F strategy by summarizing some of their main results in the context of our formulation. Nazer-Gastpar's results are based on the existence of a sequence of lattice partitions of increasing dimension. Criteria to construct LNC schemes using practical, finite-dimensional, lattice partitions are not immediately obvious. The purpose of this paper is to study practical LNC schemes under a non-coherent network model. We note that lattice

partitions possess both algebraic properties and geometric properties; both of these aspects will play important roles in this paper.

We begin with the algebraic properties in Section IV, presenting a general framework for studying LNC schemes by making a direct connection between the C&F strategy and module theory. In particular, we present a generic LNC scheme in Section IV-B that makes no assumption on the underlying lattice partition, which allows us to study a variety of LNC schemes. The generic LNC scheme is based on a natural projection, which can be viewed as a linear labelling that gives rise to a beneficial compatibility between the $\mathbb{C}$ -linear arithmetic operations performed by the channel and the linear operations in the message space that are required for linear network coding. The construction of the linear labelling is described in Section IV-C. A key observation from the construction is that the message space of an LNC scheme is determined by the module-theoretic structure of the underlying lattice partition, which can be computed by applying the Smith normal form theorem.

Applying the algebraic framework, we provide a convenient characterization of the message space of the Nazer-Gastpar scheme. More importantly, we show how standard constructions of lattice partitions can be used to design LNC schemes. In particular, we present three such examples in Section IV-D, all of which can be viewed as generalizations of the construction behind the Nazer-Gastpar scheme. Although some of these examples lead to message spaces more complicated than vector spaces, in Section IV-E, we show that only slight modifications are needed in order to implement header-based random linear network coding.

In Section V, we turn to the geometric properties of lattice partitions. Geometrically, a lattice partition is endowed with the properties of the space in which it is embedded, such as the minimum Euclidean distance and the inter-coset distance. These geometric properties of lattice partitions determine the error performance of an LNC scheme, as explained in Section V-A. In particular, we show that the error probability for hypercube-shaped LNC schemes is largely determined by the ratio of the squared minimum inter-coset distance and the variance of the effective noise in the high-SNR regime. This result leads to several design criteria for LNC schemes: 1) the receiver parameters (e.g., a_ℓ and α) should be chosen such that the variance of the effective noise is minimized, and 2) the lattice partition should be designed such that the minimum inter-coset distance is maximized.

Applying these criteria, we provide explicit algorithms for choosing receiver parameters in Section V-B and give several specific methods for optimizing lattice partitions in Section V-C. In particular, we show that the problem of choosing a single coefficient vector $(a_1, \dots, a_L)$ is a shortest vector problem and that the problem of choosing multiple coefficient vectors is closely related to some lattice reduction problem. We introduce the nominal coding gain for lattice partitions — an important figure of merit for comparing various LNC schemes. We then illustrate how to design lattice partitions with large nominal coding gains.

Section VI contains several concrete design examples of

practical LNC schemes. It is shown through both analysis and simulation that a nominal coding gain of 3 to 5 dB is easily obtained under practical constraints, such as short packet lengths and reasonable decoding complexity. (A more elaborate scheme, based on signal codes [25], is described in [26]). Section VII concludes this paper.

The following section presents some well-known mathematical preliminaries that will be useful in setting up our algebraic framework.

II. ALGEBRAIC PRELIMINARIES

In this section we recall some essential facts about principal ideal domains, modules, and the Smith normal form, all of which will be useful for our study of the algebraic properties of complex lattice partitions. All of this material is standard; see, e.g., [27]–[29].

A. Principal Ideal Domains and Gaussian Integers

Recall that a commutative ring R with identity $1 \neq 0$ is called an *integral domain* if it has no zero divisors, i.e., if, like the integers $\mathbb{Z}$, it contains no two nonzero elements whose product is zero. An element a is a *divisor* of an element b in R , written $a \mid b$, if $b = ac$ for some element $c \in R$. An element $u \in R$ is called a *unit* of R if $u \mid 1$. A non-unit element $p \in R$ is called a *prime* of R if whenever $p \mid ab$ for some elements a and b in R , then either $p \mid a$ or $p \mid b$. An *ideal* of R is a nonempty subset I of R that is closed under subtraction and inside-outside multiplication, i.e., for all $a, b \in I$, $a - b \in I$ and for all $a \in I$ and all $r \in R$, $ar \in I$. If A is any nonempty subset of R , let (A) be the smallest ideal of R containing A , called the ideal generated by A . An ideal generated by a single element is called a *principal ideal*. An integral domain in which every ideal is principal is called a *principal ideal domain* (PID).

Let R be a ring and let I be an ideal of R . Two elements a and b are said to be *congruent modulo I* if $a - b \in I$. Congruence modulo I is an equivalence relation whose equivalence classes are (additive) cosets $a + I$ of I in R . The *quotient ring* of R by I , denoted R/I , is the ring obtained by defining addition and multiplication operations on the cosets of I in R in the usual way, as

$$(a + I) + (b + I) = (a + b) + I \text{ and } (a + I) \times (b + I) = (ab) + I.$$

The so-called natural projection map $\varphi : R \rightarrow R/I$ is defined by $\varphi(r) = r + I$, for all $r \in R$.

The integers $\mathbb{Z}$ form a PID. In the context of complex lattices, the set of Gaussian integers $\mathbb{Z}[i]$ is an example of a PID. Formally, Gaussian integers are the set $\mathbb{Z}[i] \triangleq \{a + bi : a, b \in \mathbb{Z}\}$, which is a discrete subring of the complex numbers.

A Gaussian integer is called a *Gaussian prime* if it is a prime in $\mathbb{Z}[i]$. A Gaussian prime $a + bi$ satisfies exactly one of the following:

- 1) $|a| = |b| = 1$;
- 2) one of $|a|, |b|$ is zero and the other is a prime number in $\mathbb{Z}$ of the form $4n + 3$ (with n a nonnegative integer);
- 3) both of $|a|, |b|$ are nonzero and $a^2 + b^2$ is a prime number in $\mathbb{Z}$ of the form $4n + 1$.

Note that these properties are symmetric with respect to $|a|$ and $|b|$. Thus, if $a + bi$ is a Gaussian prime, so are $\{\pm a \pm bi\}$ and $\{\pm b \pm ai\}$.

B. Modules

Modules are to rings as vector spaces are to fields. Formally, let R be a commutative ring with identity $1 \neq 0$. An R -module is a set M together with 1) a binary operation $+$ on M under which M is an abelian group, and 2) an action of R on M which satisfies the same axioms as those for vector spaces.

An R -submodule of M is a subset of M which itself forms an R -module. Let N be a submodule of M . The quotient group M/N can be made into an R -module by defining an action of R satisfying, for all $r \in R$, and all $x + N \in M/N$, $r(x + N) = (rx) + N$. Again, there is a natural projection map, $\varphi : M \rightarrow M/N$, defined by $\varphi(x) = x + N$, for all $x \in M$.

Let M and N be R -modules. A map $\varphi : M \rightarrow N$ is called an *R -module homomorphism* if the map φ satisfies

- 1) $\varphi(x + y) = \varphi(x) + \varphi(y)$, for all $x, y \in M$ and
- 2) $\varphi(rx) = r\varphi(x)$, for all $r \in R, x \in M$.

The set $\ker \varphi \triangleq \{m \in M : \varphi(m) = 0\}$ is called the *kernel* of φ and the set $\varphi(M) \triangleq \{n \in N : n = \varphi(m) \text{ for some } m \in M\}$ is called the *image* of φ . Clearly, $\ker \varphi$ is a submodule of M , and $\varphi(M)$ is a submodule of N .

An R -module homomorphism $\varphi : M \rightarrow N$ is called an *R -module isomorphism* if it is both injective and surjective. In this case, the modules M and N are said to be *isomorphic*, denoted by $M \cong N$. An R -module M is called a *free module* of rank k if $M \cong R^k$ for some nonnegative integer k .

There are several isomorphism theorems for modules. The so-called “first isomorphism theorem” is useful for this paper.

Theorem 1: (First Isomorphism Theorem for Modules [28, p. 349]) Let M, N be R -modules and let $\varphi : M \rightarrow N$ be an R -module homomorphism. Then $\ker \varphi$ is a submodule of M and $M/\ker \varphi \cong \varphi(M)$.

Let M be an R -module. An element $r \in R$ is said to *annihilate M* if $rm = 0$ for all $m \in M$. The set of all elements of R that annihilate M is called the *annihilator* of M , denoted by $\text{Ann}(M)$. The annihilator $\text{Ann}(M)$ of M has some useful properties:

- 1) $\text{Ann}(M)$ is an ideal of R .
- 2) M can be made into an $R/\text{Ann}(M)$ -module by defining an action of the quotient ring $R/\text{Ann}(M)$ on M as $(r + \text{Ann}(M))m = rm, \forall r \in R, m \in M$.
- 3) More generally, M can be made into an R/I -module in this way, for any ideal I contained in $\text{Ann}(M)$.

C. Modules over a PID

Finitely-generated modules over PIDs play an important role in this paper, and are defined as follows.

Definition 1 (Finitely-Generated Modules): Let R be a commutative ring with identity $1 \neq 0$ and let M be an R -module. For any subset A of M , let $\langle A \rangle$ be the smallest submodule of M containing A , called the submodule generated

by A . If $M = \langle A \rangle$ for some finite subset A , then M is said to be *finitely generated*.

A finite module (i.e., a module that contains finitely many elements) is always finitely generated, but a finitely-generated module is not necessarily finite. For example, the even integers $2\mathbb{Z}$ form a $\mathbb{Z}$ -module generated by $\{2\}$.

Let R be a PID and let M be a finitely-generated R -module. If $\{m_1, m_2, \dots, m_t\}$ is a generating set for M , then we have a surjective R -module homomorphism $\varphi : R^t \rightarrow M$ that sends $(r_1, \dots, r_t) \in R^t$ to $\sum_{i=1}^t r_i m_i \in M$. Let K be the kernel of φ . If $(r_1, \dots, r_t) \in K$, then $\sum_{i=1}^t r_i m_i = \mathbf{0}$. Thus, each element of K induces a *relation* among $\{m_1, \dots, m_t\}$. For this reason, K is referred to as the *relation submodule* of R^t relative to the generating set $\{m_1, \dots, m_t\}$. It is known [28, p. 460] that K is finitely generated. Let $\{k_1, \dots, k_s\} \subseteq R^t$ be a generating set for K . Suppose $k_i = (a_{i1}, a_{i2}, \dots, a_{it})$, for $i = 1, \dots, s$. Then the $s \times t$ matrix $\mathbf{A} = [a_{ij}]$ is called a *relations matrix* for M relative to the two generating sets $\{m_1, \dots, m_t\}$ and $\{k_1, \dots, k_s\}$.

The following structure theorem says that a finitely-generated R -module is isomorphic to a direct sum of modules of the form R or $R/(r)$.

Theorem 2: (Structure Theorem for Finitely-Generated Modules over a PID — Invariant Factor Form [28, p. 462]) Let R be a PID and let M be a finitely generated R -module. Then for some integer $m \geq 0$ and nonzero non-unit elements $r_1, \dots, r_k$ of R satisfying the divisibility relations $r_1 \mid r_2 \mid \dots \mid r_k$,

$$M \cong R^m \oplus R/(r_1) \oplus R/(r_2) \oplus \dots \oplus R/(r_k).$$

The elements $r_1, \dots, r_k$, called the *invariant factors* of M , are unique up to multiplication by units in R .

A consequence of Theorem 2 is the so-called Smith normal form theorem.

Theorem 3 (Smith Normal Form [29]): Let R be a PID and let $\mathbf{A}$ be an $s \times t$ matrix over R ($s \leq t$). Then, for some invertible matrices $\mathbf{P}$ and $\mathbf{Q}$ over R , we have $\mathbf{PAQ} = \mathbf{D}$, where $\mathbf{D}$ is a rectangular diagonal matrix

$$\mathbf{D} = \text{diag}(\underbrace{r_1, \dots, r_k}_k, \underbrace{1, \dots, 1}_l, \underbrace{0, \dots, 0}_m)$$

with nonnegative integers k, l, m satisfying $k + l + m = s$ and nonzero non-unit elements $r_1, \dots, r_k$ of R satisfying $r_1 \mid r_2 \mid \dots \mid r_k$. The elements $r_1, \dots, r_k$, called the *invariant factors* of $\mathbf{A}$, are unique up to multiplication by units in R .

Theorems 2 and 3 are connected as follows. If the matrix $\mathbf{A}$ is a relations matrix for M , then the invariant factors of $\mathbf{A}$ are the invariant factors of M .

III. PHYSICAL-LAYER NETWORK CODING

In this section, we describe in more detail the physical-layer network coding problem at Layer 1. We first consider a “basic setup,” where the receiver is interested in computing a linear combination whose coefficient vector is *predetermined*. We then consider an “extended setup” where the receiver is interested in computing multiple linear combinations whose coefficient vectors are chosen “on-the-fly” by the receiver.

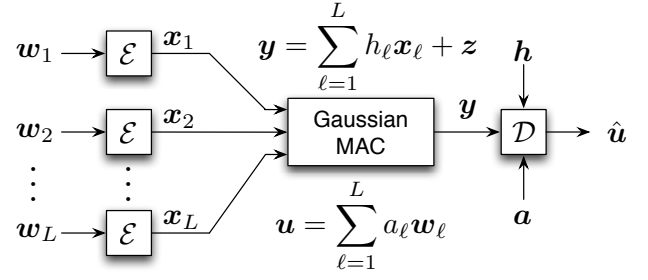


Fig. 1. Computing a linear function over a Gaussian multiple-access channel.

Finally, we briefly describe the C&F strategy of Nazer and Gastpar [14] by summarizing some of their main results.

A. Basic Setup

As shown in [14], the essence of a (linear) PNC scheme can be abstracted as the problem of computing a linear function over a Gaussian multiple-access channel as depicted in Fig. 1.

Let the message space W be a finite module over some commutative ring A . Let $\mathbf{w}_1, \dots, \mathbf{w}_L \in W$ be the messages to be transmitted by L transmitters. We regard the messages as row vectors and stack them into a matrix $\mathbf{W} = [\mathbf{w}_1^T \dots \mathbf{w}_L^T]^T$. Transmitter ℓ applies the encoder

$$\mathcal{E}(\cdot) : W \rightarrow \mathbb{C}^n, \mathbf{x}_\ell = \mathcal{E}(\mathbf{w}_\ell)$$

that maps a message in W to a complex-valued signal in $\mathbb{C}^n$ satisfying an average power constraint

$$\frac{1}{n} E [\|\mathcal{E}(\mathbf{w}_\ell)\|^2] \leq P,$$

where the expectation is taken with respect to a uniform distribution over W .

As defined in (1), the receiver observes a channel output

$$\mathbf{y} = \sum_{\ell=1}^L h_\ell \mathbf{x}_\ell + \mathbf{z}$$

where the complex-valued channel gains $h_1, \dots, h_L$ are known perfectly at the receiver, but are *unknown* at the transmitters.

The objective of the receiver (in this basic setup) is to decode the linear combination

$$\mathbf{u} = \sum_{\ell=1}^L a_\ell \mathbf{w}_\ell$$

of the transmitted messages, for a fixed coefficient vector $\mathbf{a} \triangleq (a_1, \dots, a_L)$. In matrix form, the objective of the receiver is to compute $\mathbf{u} = \mathbf{a}\mathbf{W}$. This is achieved by applying a decoder

$$\mathcal{D}(\cdot | \cdot) : \mathbb{C}^n \times \mathbb{C}^L \rightarrow W, \hat{\mathbf{u}} = \mathcal{D}(\mathbf{y} | \mathbf{h})$$

that computes an estimate $\hat{\mathbf{u}}$ of the linear function $\mathbf{u}$. A decoding error is made if $\hat{\mathbf{u}} \neq \mathbf{u}$; the probability of decoding error is denoted as

$$P_e(\mathbf{h}, \mathbf{a}) \triangleq \Pr[\hat{\mathbf{u}} \neq \mathbf{u].$$

For the above linear PNC scheme, we define the *message rate* as

$$R_{\text{mes}} \triangleq \frac{1}{n} \log_2 |W|. \quad (2)$$

For convenience, we define

$$\text{SNR} \triangleq P/N_0. \quad (3)$$

Note that the received SNR corresponding to signal $\mathbf{x}_\ell$ is equal to $|h_\ell|^2 P/N_0$. Hence, the interpretation of SNR as the average received SNR is only valid when $E[|h_\ell|^2] = 1$ for all ℓ .

This basic setup can be used to describe many existing PNC schemes, as shown in the following examples.

Example 1: Let $L = 2$, and let $A = W = \mathbb{Z}_2$. Consider the encoder

$$\mathcal{E}(w) = \gamma \left(w - \frac{1}{2} \right), \quad w \in \mathbb{Z}_2 = \{0, 1\}$$

where $\gamma > 0$ is a scaling factor, and we treat $\mathbb{Z}_2 = \{0, 1\}$ as a subset of $\mathbb{C}$. Suppose $\mathbf{h} = [1 \ 1]$. Let $\mathbf{a} = [1 \ 1]$ be the fixed coefficient vector. Then a decoder can be constructed as

$$\mathcal{D}(y | [1 \ 1]) = \begin{cases} 1, & \text{if } |\text{Re}\{y\}| < \gamma/2 \\ 0, & \text{otherwise.} \end{cases}$$

This is the simplest form of PNC [4], [5].

Example 2: Let $L = 2$, and let $A = W = \mathbb{Z}[i]/(m)$, where m is some positive integer. Consider the encoder

$$\mathcal{E}(w) = \gamma(w - d),$$

$$w \in \mathbb{Z}[i]/(m) = \{a + bi : a, b \in \{0, \dots, m-1\}\}$$

where $d = \left(\frac{m-1}{2}\right)(1+i)$, $\gamma > 0$ is a scaling factor, and we treat $\mathbb{Z}[i]/(m) = \{a + bi : a, b \in \{0, \dots, m-1\}\}$ as a subset of $\mathbb{C}$. Suppose $\mathbf{h} = [1 \ 1]$. Let $\mathbf{a} = [1 \ 1]$ be the fixed coefficient vector. Then a natural (although suboptimal) decoder is given by

$$\mathcal{D}(y | [1 \ 1]) = (\lfloor \text{Re}\{y'\} \rfloor \bmod m) + i(\lfloor \text{Im}\{y'\} \rfloor \bmod m),$$

where $y' = y/\gamma + 2d$. This scheme is known as the m^2 -QAM PNC scheme [4].

B. Extended Setup

There are several restrictions on the previous basic setup. For example, the coefficient vector is fixed rather than chosen “on-the-fly” by the receiver, and only one linear combination is computed by the receiver rather than multiple linear combinations. Hence, a more general setup of linear PNC schemes can be described as follows. A linear PNC scheme consists of an encoder

$$\mathcal{E}(\cdot) : W \rightarrow \mathbb{C}^n, \quad \mathbf{x}_\ell = \mathcal{E}(\mathbf{w}_\ell)$$

and a decoder

$$\mathcal{D}(\cdot | \cdot) : \mathbb{C}^n \times \mathbb{C}^L \rightarrow W^m, \quad (\hat{\mathbf{u}}_1, \dots, \hat{\mathbf{u}}_m) = \mathcal{D}(\mathbf{y} | \mathbf{h}).$$

The encoder maps a message $\mathbf{w}_\ell$ in W to a complex-valued signal $\mathbf{x}_\ell$ in $\mathbb{C}^n$. The decoder computes estimates $\hat{\mathbf{u}}_1, \dots, \hat{\mathbf{u}}_m$ of m linear functions $\mathbf{u}_1, \dots, \mathbf{u}_m$ whose coefficient vectors are chosen by the receiver. (In practice, even the parameter m can be chosen “on-the-fly” by the receiver.)

Let $\mathbf{u}_i = \sum_{\ell=1}^L a_{i\ell} \mathbf{w}_\ell$, and let $\mathbf{A} = [a_{i\ell}]$ be an $m \times L$ matrix of coefficients over A . In matrix form, the decoder wishes to decode $\mathbf{U} = \mathbf{A}\mathbf{W}$, where $\mathbf{W}$ is the matrix of transmitted messages. A decoding error is made if $\hat{\mathbf{U}} \neq \mathbf{A}\mathbf{W}$ where $\hat{\mathbf{U}} = [\hat{\mathbf{u}}_1^T \dots \hat{\mathbf{u}}_m^T]^T$; the probability of decoding error is denoted as

$$P_e(\mathbf{h}, \mathbf{A}) \triangleq \Pr[\hat{\mathbf{U}} \neq \mathbf{A}\mathbf{W}].$$

In addition to the generality, the extended model has some other advantages over the basic setup. If a receiver is able to decode more than one linear combination successfully, then it is beneficial for the network throughput especially when the receiver is a destination. If a receiver is required to decode L (linearly independent) linear combinations, then the extended model can be regarded as a distributed $L \times 1$ MIMO system or a multi-user detection system. As such, a PNC scheme is automatically a solution to these communication problems and may provide some potential performance improvement. This advantage of the extended model has been explored in [30], [31].

C. Nazer-Gastpar Scheme

Nazer and Gastpar [14] propose a lattice-partition-based PNC scheme for which the commutative ring A is chosen to be the Gaussian integers $\mathbb{Z}[i]$. Although not originally stated in this form, some of the main results in [14] can be summarized as in the following theorem.

Theorem 4 ([14]): Let $\mathbf{u}_1, \dots, \mathbf{u}_m$ be a set of $\mathbb{Z}[i]$ -linear functions of the transmitted messages and let $\mathbf{a}_i$ be the coefficient vector for $\mathbf{u}_i$, i.e., the i th row of the coefficient matrix $\mathbf{A}$. Let r be a real number satisfying

$$r < \min_i \left\{ \log_2 \left(\left(\|\mathbf{a}_i\|^2 - \frac{\text{SNR}|\mathbf{a}_i \mathbf{h}^\dagger|^2}{1 + \text{SNR}\|\mathbf{h}\|^2} \right)^{-1} \right) \right\},$$

where SNR is defined in (3). Then there exists an (infinite) sequence of lattice partitions Λ_j/Λ'_j , where Λ_j and Λ'_j have dimension j , based on which a PNC scheme satisfies the following properties:

- 1) the message rate R_{mes} (as defined in (2)) is given by $R_{\text{mes}} = \max\{r, 0\}$;
- 2) the probability of decoding error $P_e(\mathbf{h}, \mathbf{A}) \rightarrow 0$, as $j \rightarrow \infty$.

For the basic setup, Theorem 4 implies that the following message rate

$$R_{\text{mes}} = \max \left\{ \log_2 \left(\left(\|\mathbf{a}\|^2 - \frac{\text{SNR}|\mathbf{a} \mathbf{h}^\dagger|^2}{1 + \text{SNR}\|\mathbf{h}\|^2} \right)^{-1} \right), 0 \right\},$$

is achievable, where $\mathbf{a}$ is the fixed coefficient vector.

For the extended setup, Theorem 4 implies that a linear function $\mathbf{u}_i$ can be decoded correctly as long as

$$\log_2 \left(\left(\|\mathbf{a}_i\|^2 - \frac{\text{SNR}|\mathbf{a}_i \mathbf{h}^\dagger|^2}{1 + \text{SNR}\|\mathbf{h}\|^2} \right)^{-1} \right) > R_{\text{mes}},$$

where $\mathbf{a}_i$ is the coefficient vector for $\mathbf{u}_i$.

Note that Nazer-Gastpar’s results are based on the existence of a “good” sequence of lattice partitions of increasing dimension. Criteria to design practical, finite-dimensional, LNC

schemes are not immediately obvious from these results. In the remainder of this paper, we will develop an algebraic framework for studying LNC schemes, which facilitates the construction of practical LNC schemes as well as the analysis of their performance.

IV. ALGEBRAIC FRAMEWORK OF LATTICE NETWORK CODING

Inspired by Nazer-Gastpar's C&F scheme, in this section, we present a general framework for studying a variety of LNC schemes. Our framework is algebraic and makes a direct connection between the Nazer-Gastpar scheme and module theory. This connection not only sheds some new light on the Nazer-Gastpar scheme, but also leads to several generalized constructions of LNC schemes.

A. Definitions

Our algebraic framework is based on a class of complex lattices called R -lattices, which are defined as follows. Let R be a discrete subring of $\mathbb{C}$ forming a principal ideal domain (PID). Typical examples include the integer numbers $\mathbb{Z}$ and the Gaussian integers $\mathbb{Z}[i]$. Let $N \leq n$. An R -lattice of dimension N in $\mathbb{C}^n$ is defined as the set of all R -linear combinations of N linearly independent vectors in $\mathbb{C}^n$, i.e.,

$$\Lambda = \{\mathbf{r}\mathbf{G}_\Lambda : \mathbf{r} \in R^N\},$$

where $\mathbf{G}_\Lambda \in \mathbb{C}^{N \times n}$ is full-rank over $\mathbb{C}$ and is called a *generator matrix* for Λ . (In most cases considered in this paper, $N = n$.) Algebraically, an R -lattice is an R -module.

An R -sublattice Λ' of Λ is a subset of Λ which is itself an R -lattice, i.e., it is an R -submodule of Λ . The set of all the cosets of Λ' in Λ , denoted by Λ/Λ' , forms a partition of Λ , hereafter called an R -lattice partition. Throughout this paper, we only consider the case of finite lattice partitions, i.e., $|\Lambda/\Lambda'|$ is finite, which is equivalent to saying that Λ' and Λ have the same dimension.

A nearest-lattice-point (NLP) decoder is a map $\mathcal{D}_\Lambda : \mathbb{C}^n \rightarrow \Lambda$ that sends a point $\mathbf{x} \in \mathbb{C}^n$ to a nearest lattice point in Euclidean distance, i.e.,

$$\mathcal{D}_\Lambda(\mathbf{x}) \triangleq \arg \min_{\boldsymbol{\lambda} \in \Lambda} \|\mathbf{x} - \boldsymbol{\lambda}\|. \quad (4)$$

The set $\mathcal{V}(\Lambda) \triangleq \{\mathbf{x} : \mathcal{D}_\Lambda(\mathbf{x}) = \mathbf{0}\}$ of all points in $\mathbb{C}^n$ that are closest to the origin is called the *Voronoi region* around the origin of the lattice Λ . The NLP decoder satisfies, for all lattice points $\boldsymbol{\lambda} \in \Lambda$ and all vectors $\mathbf{x} \in \mathbb{C}^n$,

$$\mathcal{D}_\Lambda(\boldsymbol{\lambda} + \mathbf{x}) = \boldsymbol{\lambda} + \mathcal{D}_\Lambda(\mathbf{x}). \quad (5)$$

B. Encoding and Decoding

We present a generic LNC scheme that makes no assumptions on the underlying lattice partition. As such, our generic LNC scheme can be applied to study a variety of LNC schemes.

We let the message space $W = \Lambda/\Lambda'$. Clearly, W is a finitely-generated R -module. The encoding and decoding methods of the generic scheme are based on the natural

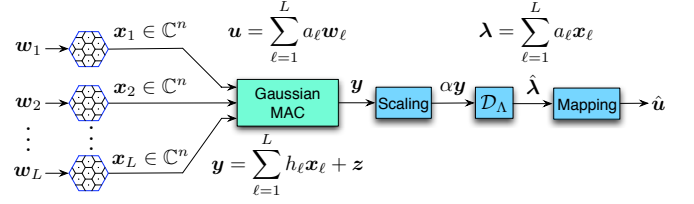


Fig. 2. Architecture of the encoding and decoding methods for LNC.

projection map $\varphi : \Lambda \rightarrow \Lambda/\Lambda'$, taking $\boldsymbol{\lambda} \in \Lambda$ to a coset $\boldsymbol{\lambda} + \Lambda'$ of Λ' in Λ containing $\boldsymbol{\lambda}$.

We note that the map φ may be regarded as a *labelling* of the points of Λ with elements of the module W ; a lattice point $\boldsymbol{\lambda} \in \Lambda$ is labelled with its projection $\varphi(\boldsymbol{\lambda}) = \boldsymbol{\lambda} + \Lambda'$. We note that the labelling φ is R -linear; thus for all $r_1, r_2 \in R$ and all $\boldsymbol{\lambda}_1, \boldsymbol{\lambda}_2 \in \Lambda$ we have $\varphi(r_1 \boldsymbol{\lambda}_1 + r_2 \boldsymbol{\lambda}_2) = r_1 \varphi(\boldsymbol{\lambda}_1) + r_2 \varphi(\boldsymbol{\lambda}_2)$. For this reason, we refer to the map φ as a *linear labelling* of Λ . When R is a subring of $\mathbb{C}$, as will be the case throughout this paper, the use of a linear labelling induces a natural compatibility between the $\mathbb{C}$ -linear arithmetic of the multiple-access channel observed by the receiver, and the R -linear arithmetic in the message space W , and this compatibility is what we exploit to define a generic LNC scheme.

We will also need an injective map $\bar{\varphi} : W \rightarrow \Lambda$ having the property that $\varphi(\bar{\varphi}(\mathbf{w})) = \mathbf{w}$, for all $\mathbf{w} \in W$. We view $\bar{\varphi}$ as implementing an embedding of W in Λ in a manner that is compatible with φ ; equivalently, the image of $\bar{\varphi}$ provides a system of coset representatives for the cosets of Λ' in Λ .

A high-level view of our generic LNC scheme is as follows. Equipped with the linear labelling φ (and an associated embedding map $\bar{\varphi}$), the encoder maps a message $\mathbf{w} + \Lambda' \in \Lambda/\Lambda'$ to a point of Λ in $\mathbf{w} + \Lambda'$ by using the embedding map $\bar{\varphi}$; the decoder estimates one or more R -linear combinations from a $\mathbb{C}$ -linear combination (i.e., the received signal) and then maps these R -linear combinations to elements in Λ/Λ' by using the linear labelling φ . We now describe these procedures in more detail.

1) *Encoding and decoding for the basic setup:* Let $\mathbf{a}$ be a predetermined coefficient vector, and let $\mathbf{W}$ denote the matrix of transmitted messages. The receiver is interested in decoding $\mathbf{a}\mathbf{W}$.

A generic LNC scheme consists of an encoder

$$\mathcal{E}(\cdot) : W \rightarrow \mathbb{C}^n, \quad \mathbf{x}_\ell = \mathcal{E}(\mathbf{w}_\ell) = \bar{\varphi}(\mathbf{w}_\ell) - \mathcal{D}_{\Lambda'}(\bar{\varphi}(\mathbf{w}_\ell)) \quad (6)$$

and a decoder

$$\mathcal{D}(\cdot | \cdot) : \mathbb{C}^n \times \mathbb{C}^L \rightarrow W, \quad \hat{\mathbf{u}} = \mathcal{D}(\mathbf{y} | \mathbf{h}) = \varphi(\mathcal{D}_\Lambda(\alpha \mathbf{y})), \quad (7)$$

as depicted in Fig. 2.

We note that the encoder $\mathcal{E}$ is a standard Voronoi constellation encoder, as described, e.g., in [32], [33], taking the messages in W to a system of coset representatives for the cosets of Λ' in Λ in which each coset representative falls within the Voronoi region $\mathcal{V}(\Lambda')$ around the origin of Λ' . The Voronoi region $\mathcal{V}(\Lambda')$ can therefore be interpreted as the shaping region. In practice, for reasons of energy-efficiency, it may be preferable (as in Examples 1 and 2) to transmit points

from a translate of Λ rather than from Λ . Such translation is easily implemented at the transmitters and accommodated (by subtraction) at the receiver. A pseudorandom additive dither can be implemented similarly.

We note that the decoder $\mathcal{D}$ first detects an R -linear combination $\sum_{\ell} a_{\ell} \mathbf{x}_{\ell}$ from the $\mathbb{C}$ -linear combination $\sum_{\ell} h_{\ell} \mathbf{x}_{\ell} + \mathbf{z}$ (i.e., the received signal) by using a scaling operator α and an NLP decoder $\mathcal{D}_{\Lambda}$. The decoder then maps $\sum_{\ell} a_{\ell} \mathbf{x}_{\ell}$ (an element in Λ) to $\sum_{\ell} a_{\ell} \mathbf{w}_{\ell}$ (an element in W) by using the linear labelling φ . The rationale behind this decoding architecture is explained by the following proposition.

Define

$$\mathbf{n} \triangleq \sum_{\ell=1}^L (\alpha h_{\ell} - a_{\ell}) \mathbf{x}_{\ell} + \alpha \mathbf{z}, \quad (8)$$

which is referred to as the *effective noise* for the reason as seen shortly.

Proposition 1: The linear function $\mathbf{u} = \sum_{\ell} a_{\ell} \mathbf{w}_{\ell}$ is decoded correctly if and only if $\mathcal{D}_{\Lambda}(\mathbf{n}) \in \Lambda'$.

Proof: Note that

$$\begin{aligned} \alpha \mathbf{y} &= \sum_{\ell=1}^L \alpha h_{\ell} \mathbf{x}_{\ell} + \alpha \mathbf{z} \\ &= \sum_{\ell=1}^L a_{\ell} \mathbf{x}_{\ell} + \underbrace{\sum_{\ell=1}^L (\alpha h_{\ell} - a_{\ell}) \mathbf{x}_{\ell} + \alpha \mathbf{z}}_{\mathbf{n}} \\ &= \sum_{\ell=1}^L a_{\ell} \mathbf{x}_{\ell} + \mathbf{n} \\ &= \sum_{\ell=1}^L a_{\ell} (\bar{\varphi}(\mathbf{w}_{\ell}) - \mathcal{D}_{\Lambda'}(\bar{\varphi}(\mathbf{w}_{\ell}))) + \mathbf{n} \end{aligned}$$

Thus, we have

$$\begin{aligned} \hat{\mathbf{u}} &= \varphi(\mathcal{D}_{\Lambda}(\alpha \mathbf{y})) \\ &= \varphi\left(\mathcal{D}_{\Lambda}\left(\sum_{\ell=1}^L a_{\ell} (\bar{\varphi}(\mathbf{w}_{\ell}) - \mathcal{D}_{\Lambda'}(\bar{\varphi}(\mathbf{w}_{\ell}))) + \mathbf{n}\right)\right) \\ &= \varphi\left(\sum_{\ell=1}^L a_{\ell} (\bar{\varphi}(\mathbf{w}_{\ell}) - \mathcal{D}_{\Lambda'}(\bar{\varphi}(\mathbf{w}_{\ell}))) + \mathcal{D}_{\Lambda}(\mathbf{n})\right) \quad (9) \\ &= \sum_{\ell=1}^L a_{\ell} \mathbf{w}_{\ell} + \varphi(\mathcal{D}_{\Lambda}(\mathbf{n})) \quad (10) \end{aligned}$$

where (9) follows from the property of an NLP decoder $\mathcal{D}_{\Lambda}$ and (10) follows from the fact that φ is an R -module homomorphism with kernel Λ' . Therefore, $\hat{\mathbf{u}} = \mathbf{u}$ if and only if $\varphi(\mathcal{D}_{\Lambda}(\mathbf{n})) = \mathbf{0}$, or equivalently, $\mathcal{D}_{\Lambda}(\mathbf{n}) \in \Lambda'$. ■

Proposition 1 suggests that the effective noise $\mathbf{n}$ should be made “small” so that $\mathcal{D}_{\Lambda}(\mathbf{n})$ returns, in particular, the point $\mathbf{0}$. This can be achieved by choosing an appropriate scalar α , which will be discussed fully in Sec. V-B. Here, we point out that the decoder architecture induces an equivalent point-to-point channel with input $\sum_{\ell} a_{\ell} \mathbf{x}_{\ell}$ and additive channel noise $\mathbf{n}$. Hence, the decoding complexity of our generic scheme is not essentially different from that for a point-to-point channel using the same lattice partition.

We also note that a generalized lattice quantizer that satisfies the property (5) (e.g., see [34]) can also be applied to the encoding and decoding operations. This may provide some practical advantages (at the expense of error performance).

2) Encoding and decoding for the extended setup: The encoding architecture for the extended setup is precisely the same as that for the basic setup. The decoding architecture is similar to that for the basic setup, except the receiver has the freedom to choose coefficient vectors for multiple linear combinations. Once these coefficient vectors are chosen, the receiver applies exactly the same decoder as that for the basic setup. Hence, the decoding architecture for the extended setup only contains an additional component of choosing multiple coefficient vectors, which will be discussed fully in Sec. V-B.

C. Algebraic Structure of Lattice Partitions

As shown in the previous section, the linear labelling φ (and the associated embedding $\bar{\varphi}$) play important roles in the encoding and decoding methods of our generic scheme. In this section, we construct the maps φ and $\bar{\varphi}$ explicitly and show that the message space of the generic LNC scheme is determined by the module-theoretic structure of the lattice partition Λ/Λ' . Our main theoretical tool is the fundamental theorem of finitely generated modules over a PID.

Theorem 5 (Structural Theorem for R -Lattice Partitions): Let Λ/Λ' be a finite R -lattice partition. Then for some nonzero, non-unit elements $\pi_1, \dots, \pi_k \in R$ satisfying the divisibility relations $\pi_1 \mid \pi_2 \mid \dots \mid \pi_k$,

$$\Lambda/\Lambda' \cong R/(\pi_1) \oplus R/(\pi_2) \oplus \dots \oplus R/(\pi_k).$$

Proof: By Theorem 2, we have

$$\Lambda/\Lambda' \cong R^m \oplus R/(r_1) \oplus R/(r_2) \oplus \dots \oplus R/(r_k),$$

for some integer m and some invariant factors $r_1, \dots, r_k$ of Λ/Λ' . Note that, since $|\Lambda/\Lambda'|$ is assumed to be finite, the integer m must be zero. ■

Theorem 5 characterizes the module-theoretic structure of Λ/Λ' . By Theorem 5, the message space W , which we have taken to be equal to Λ/Λ' , is isomorphic to $R/(r_1) \oplus \dots \oplus R/(r_k)$. Without loss of generality, we may identify W with this direct sum in the rest of the paper.

To construct the linear labelling φ from Λ to W , we apply the Smith normal form, as shown in the following theorem.

Theorem 6: Let Λ/Λ' be a finite R -lattice partition. Then there exist generator matrices $\mathbf{G}_{\Lambda}$ and $\mathbf{G}_{\Lambda'}$ for Λ and Λ' , respectively, satisfying

$$\mathbf{G}_{\Lambda'} = \begin{bmatrix} \text{diag}(\pi_1, \dots, \pi_k) & \mathbf{0} \\ \mathbf{0} & \mathbf{I}_{N-k} \end{bmatrix} \mathbf{G}_{\Lambda} \quad (11)$$

where $\pi_1, \dots, \pi_k$ are the invariant factors of Λ/Λ' . Moreover, the map

$$\varphi : \Lambda \rightarrow R/(\pi_1) \oplus \dots \oplus R/(\pi_k)$$

given by

$$\varphi(\mathbf{r} \mathbf{G}_{\Lambda}) = (r_1 + (\pi_1), \dots, r_k + (\pi_k)) \quad (12)$$

is a surjective R -module homomorphism with kernel Λ' .

Proof: Let $\tilde{\mathbf{G}}_\Lambda$ and $\tilde{\mathbf{G}}_{\Lambda'}$ be any generator matrices for Λ and Λ' , respectively. Then $\tilde{\mathbf{G}}_{\Lambda'} = \mathbf{J}\tilde{\mathbf{G}}_\Lambda$, for some nonsingular matrix $\mathbf{J} \in R^{N \times N}$. Since R is a PID, by Theorem 3, the matrix $\mathbf{J}$ has a Smith normal form

$$\mathbf{D} = \begin{bmatrix} \pi_1 & & & \\ & \ddots & & \\ & & \pi_k & \\ & & & \mathbf{I}_{N-k} \end{bmatrix} = \mathbf{P}\mathbf{J}\mathbf{Q}$$

where $\mathbf{P}, \mathbf{Q} \in R^{N \times N}$ are invertible over R , and $\pi_1 \mid \pi_2 \mid \dots \mid \pi_k$. Thus, we can take

$$\begin{aligned} \mathbf{G}_\Lambda &= \mathbf{Q}^{-1}\tilde{\mathbf{G}}_\Lambda \\ \mathbf{G}_{\Lambda'} &= \mathbf{P}\tilde{\mathbf{G}}_{\Lambda'} = \mathbf{D}\mathbf{G}_\Lambda \end{aligned}$$

as new generator matrices for Λ and Λ' . Here our notation suggests that $\pi_1, \dots, \pi_k$ are the invariant factors of Λ/Λ' ; this fact will be clear after the second statement is proved.

Since $\mathbf{G}_\Lambda$ has rank N , it follows that each lattice point $\boldsymbol{\lambda} \in \Lambda$ has a unique representation as $\boldsymbol{\lambda} = \mathbf{r}\mathbf{G}_\Lambda$, and thus the map φ in (12) is well defined. It is easy to see that the map φ is a surjective R -module homomorphism. Next, we will show that the kernel of φ is Λ' . Note that

$$\varphi(\mathbf{r}\mathbf{G}_\Lambda) = \mathbf{0} \iff r_i \in (\pi_i), \forall i = 1, \dots, k.$$

Note also that

$$\Lambda' = \{\mathbf{r}\mathbf{G}_\Lambda : r_i \in (\pi_i), \forall i = 1, \dots, k\},$$

because $\mathbf{G}_{\Lambda'} = \mathbf{D}\mathbf{G}_\Lambda$. Hence, the kernel of φ is Λ' . Then by the first isomorphism theorem (Theorem 1), we have

$$\Lambda/\Lambda' \cong R/(\pi_1) \oplus \dots \oplus R/(\pi_k).$$

Finally, by the uniqueness in Theorem 2, $\pi_1, \dots, \pi_k$ must be the invariant factors of Λ/Λ' . This also follows from the observation that $\mathbf{J}$ is a relations matrix for Λ/Λ' relative to the rows of $\tilde{\mathbf{G}}_\Lambda$ and $\tilde{\mathbf{G}}_{\Lambda'}$. ■

Theorem 6 constructs a surjective R -module homomorphism $\varphi : \Lambda \rightarrow W$, i.e., an R -linear labelling of Λ , explicitly. The next step is to construct the map $\bar{\varphi}$. Consider the natural projection map $\sigma : R^k \rightarrow W$ defined by $\sigma(\mathbf{r}) = (r_1 + (\pi_1), \dots, r_k + (\pi_k))$. Let $\bar{\sigma} : W \rightarrow R^k$ be some injective map such that $\sigma(\bar{\sigma}(\mathbf{w})) = \mathbf{w}$, for all $\mathbf{w} \in W$. Then the map $\bar{\varphi}$ can be constructed as

$$\bar{\varphi}(\mathbf{w}) = \bar{\sigma}(\mathbf{w}) \begin{bmatrix} \mathbf{I}_k & \mathbf{0} \end{bmatrix} \mathbf{G}_\Lambda. \quad (13)$$

To sum up, the maps φ and $\bar{\varphi}$ can be constructed explicitly by using (12) and (13) whenever there exist generator matrices $\mathbf{G}_\Lambda$ and $\mathbf{G}_{\Lambda'}$ satisfying the relation (11).

D. Constructions of Lattice Partitions

In the previous sections, we presented an algebraic framework for studying a variety of LNC schemes. In this section, we first apply the algebraic framework to study Nazer-Gastpar's C&F scheme, showing that the message space of the Nazer-Gastpar scheme is isomorphic to a vector space over $\mathbb{F}_{p^2}$ or a direct sum of two vector spaces over $\mathbb{F}_p$, depending on the prime parameter p . We then apply the algebraic framework

to construct three classes of lattice partitions, all of which can be viewed as generalizations of Nazer-Gastpar's construction of lattice partitions.

The following example describes a variant of the class of lattice partitions constructed by Nazer and Gastpar.

Example 3 (Lifted Construction A): Let p be a prime in $\mathbb{Z}$. Let $\mathcal{C}$ be a linear code of length n over $\mathbb{Z}/(p)$. Without loss of generality, we may assume the linear code $\mathcal{C}$ is systematic. Define a ‘‘Construction A lattice’’ [35] $\Lambda_{\mathcal{C}}$ as

$$\Lambda_{\mathcal{C}} \triangleq \{\boldsymbol{\lambda} \in \mathbb{Z}^n : \sigma(\boldsymbol{\lambda}) \in \mathcal{C}\},$$

where $\sigma : \mathbb{Z}^n \rightarrow (\mathbb{Z}/(p))^n$ is the natural projection map. Define

$$\Lambda'_{\mathcal{C}} \triangleq \{p\mathbf{r} : \mathbf{r} \in \mathbb{Z}^n\}.$$

It is easy to see that $\Lambda'_{\mathcal{C}}$ is a sublattice of $\Lambda_{\mathcal{C}}$. Hence, we obtain a $\mathbb{Z}$ -lattice partition $\Lambda_{\mathcal{C}}/\Lambda'_{\mathcal{C}}$ from the linear code $\mathcal{C}$.

Now we ‘‘lift’’ this $\mathbb{Z}$ -lattice partition $\Lambda_{\mathcal{C}}/\Lambda'_{\mathcal{C}}$ to a $\mathbb{Z}[i]$ -lattice partition. Let $\bar{\Lambda}_{\mathcal{C}} = \Lambda_{\mathcal{C}} + i\Lambda_{\mathcal{C}}$, i.e.,

$$\bar{\Lambda}_{\mathcal{C}} = \{\boldsymbol{\lambda} \in \mathbb{Z}[i]^n : \text{Re}\{\boldsymbol{\lambda}\}, \text{Im}\{\boldsymbol{\lambda}\} \in \Lambda_{\mathcal{C}}\}.$$

Similarly, let $\bar{\Lambda}'_{\mathcal{C}} = \Lambda'_{\mathcal{C}} + i\Lambda'_{\mathcal{C}}$. In this way, we obtain a $\mathbb{Z}[i]$ -lattice partition $\bar{\Lambda}_{\mathcal{C}}/\bar{\Lambda}'_{\mathcal{C}}$.

To study the structure of the partition $\bar{\Lambda}_{\mathcal{C}}/\bar{\Lambda}'_{\mathcal{C}}$, we specify two generator matrices satisfying the relation (11). We note that the lattice $\Lambda_{\mathcal{C}}$ has a generator matrix $\mathbf{G}_{\Lambda_{\mathcal{C}}}$ given by

$$\mathbf{G}_{\Lambda_{\mathcal{C}}} = \begin{bmatrix} \mathbf{I}_k & \mathbf{B}_{k \times (n-k)} \\ \mathbf{0}_{(n-k) \times k} & p\mathbf{I}_{n-k} \end{bmatrix},$$

where $\sigma[\mathbf{I} \ \mathbf{B}]$ is a generator matrix for $\mathcal{C}$. The lifted lattice $\bar{\Lambda}_{\mathcal{C}}$ has a generator matrix $\mathbf{G}_{\bar{\Lambda}_{\mathcal{C}}}$ of the same form (but over $\mathbb{Z}[i]$). Similarly, we note that the lattice $\bar{\Lambda}'_{\mathcal{C}}$ has a generator matrix $\mathbf{G}_{\bar{\Lambda}'_{\mathcal{C}}}$ given by

$$\mathbf{G}_{\bar{\Lambda}'_{\mathcal{C}}} = \begin{bmatrix} p\mathbf{I}_k & p\mathbf{B}_{k \times (n-k)} \\ \mathbf{0}_{(n-k) \times k} & p\mathbf{I}_{n-k} \end{bmatrix}.$$

These two generator matrices $\mathbf{G}_{\Lambda_{\mathcal{C}}}$ and $\mathbf{G}_{\bar{\Lambda}'_{\mathcal{C}}}$ satisfy

$$\mathbf{G}_{\bar{\Lambda}'_{\mathcal{C}}} = \begin{bmatrix} p\mathbf{I}_k & \mathbf{0} \\ \mathbf{0} & \mathbf{I}_{n-k} \end{bmatrix} \mathbf{G}_{\Lambda_{\mathcal{C}}}.$$

It follows from Theorem 6 that $\Lambda/\Lambda' \cong (\mathbb{Z}[i]/(p))^k$. ■

If the prime p in Example 3 is of the form $4n+3$, then p is a Gaussian prime and Λ/Λ' is isomorphic to a vector space over the field $\mathbb{Z}[i]/(p)$. If the prime p is of the form $4n+1$ or if $p=2$, then p is not a Gaussian prime and Λ/Λ' is isomorphic to a free module over the ring $\mathbb{Z}[i]/(p)$. In this case, since p can be factored into two Gaussian primes, i.e., $p = \pi\pi^*$, where π^* is a conjugate of π , it can be shown from the Chinese remainder theorem [28, p. 265] that Λ/Λ' is isomorphic to a direct sum of two vector spaces, i.e., $\Lambda/\Lambda' \cong \mathbb{Z}[i]/(\pi)^k \oplus \mathbb{Z}[i]/(\pi^*)^k$. To sum up, the message space W is isomorphic to either a vector space over $\mathbb{F}_{p^2}$ or a direct sum of two vector spaces over $\mathbb{F}_p$, depending on the choice of the prime p .

Nazer-Gastpar's construction of lattice partitions is based on Construction A. As is well known, Construction A may produce ‘‘asymptotically-good’’ lattices and/or lattice partitions in the sense of [15], [36]. However, this generally requires both the prime p and the dimension n to go to infinity. From

a practical point of view, Construction A may not be the best method of constructing lattices and/or lattice partitions. There are several alternative methods in the literature, such as complex Construction A, Construction D [35], low-density-parity-check lattices [37], signal codes [25], and low-density lattice codes [38], to name a few. Our algebraic framework suggests that all of these methods may be used to construct lattice partitions for LNC schemes. In the sequel, we present three constructions of lattice partitions, all of which can be viewed as generalizations of Nazer-Gastpar's construction.

The first example is based on complex Construction A.

Example 4 (Complex Construction A): Let π be a prime in R . Let $\mathcal{C}$ be a linear code of length n over $R/(\pi)$. Without loss of generality, we may assume the linear code $\mathcal{C}$ is systematic.

Define a “complex Construction A lattice” [35] $\Lambda_{\mathcal{C}}$ as

$$\Lambda_{\mathcal{C}} \triangleq \{\lambda \in R^n : \sigma(\lambda) \in \mathcal{C}\},$$

where $\sigma : R^n \rightarrow (R/(\pi))^n$ is the natural projection map. Define

$$\Lambda'_{\mathcal{C}} \triangleq \{\pi \mathbf{r} : \mathbf{r} \in R^n\}.$$

It is easy to see $\Lambda'_{\mathcal{C}}$ is a sublattice of $\Lambda_{\mathcal{C}}$. Hence, we obtain a lattice partition $\Lambda_{\mathcal{C}}/\Lambda'_{\mathcal{C}}$ from the linear code $\mathcal{C}$.

To study the structure of $\Lambda_{\mathcal{C}}/\Lambda'_{\mathcal{C}}$, we specify two generator matrices satisfying the relation (11). It is well-known that $\Lambda_{\mathcal{C}}$ has a generator matrix $\mathbf{G}_{\Lambda_{\mathcal{C}}}$ given by

$$\mathbf{G}_{\Lambda_{\mathcal{C}}} = \begin{bmatrix} \mathbf{I}_k & \mathbf{B}_{k \times (n-k)} \\ \mathbf{0}_{(n-k) \times k} & \pi \mathbf{I}_{n-k} \end{bmatrix},$$

and that $\Lambda'_{\mathcal{C}}$ has a generator matrix $\mathbf{G}_{\Lambda'_{\mathcal{C}}}$ given by

$$\mathbf{G}_{\Lambda'_{\mathcal{C}}} = \begin{bmatrix} \pi \mathbf{I}_k & \pi \mathbf{B}_{k \times (n-k)} \\ \mathbf{0}_{(n-k) \times k} & \pi \mathbf{I}_{n-k} \end{bmatrix}.$$

These two generator matrices satisfy

$$\mathbf{G}_{\Lambda'_{\mathcal{C}}} = \begin{bmatrix} \pi \mathbf{I}_k & \mathbf{0} \\ \mathbf{0} & \mathbf{I}_{n-k} \end{bmatrix} \mathbf{G}_{\Lambda_{\mathcal{C}}}.$$

Hence, we have $\Lambda/\Lambda' \cong (R/(\pi))^k$. We note that complex Construction A reduces to lifted Construction A when $R = \mathbb{Z}[i]$, π is a prime in $\mathbb{Z}$ of the form $4n+3$, and the matrix $\mathbf{B}_{k \times (n-k)}$ in $\mathbf{G}_{\Lambda'_{\mathcal{C}}}$ contains only elements of $\mathbb{Z}$. ■

Our next example replaces Construction A with Construction D.

Example 5 (Lifted Construction D): Let p be a prime in $\mathbb{Z}$. Let $\mathcal{C}_0 \supseteq \mathcal{C}_1 \supseteq \dots \supseteq \mathcal{C}_a$ be nested linear codes of length n over $\mathbb{Z}/(p)$, where $\mathcal{C}_i$ has parameters $[n, k_i]$ for $i = 0, \dots, a$, and $k_0 = n$. Without loss of generality, there exists a basis $\{\mathbf{g}_1, \dots, \mathbf{g}_n\}$ for $(\mathbb{Z}/(p))^n$ such that 1) $\mathbf{g}_1, \dots, \mathbf{g}_{k_i}$ span $\mathcal{C}_i$ for $i = 0, \dots, a$, and 2) if $\mathbf{G}$ denotes the matrix with rows $\mathbf{g}_1, \dots, \mathbf{g}_n$, some permutation of the rows of $\mathbf{G}$ forms an upper triangular matrix with diagonal elements equal to 1.

Using the nested linear codes $\{\mathcal{C}_i, 0 \leq i \leq a\}$, we define a “Construction D lattice” [35] Λ as

$$\Lambda \triangleq \bigcup \left\{ p^a \mathbb{Z}^n + \sum_{i=1}^a \sum_{j=1}^{k_i} p^{a-i} \beta_{ij} \bar{\sigma}(\mathbf{g}_j) : \beta_{ij} \in \mathbb{Z}/(p) \right\}$$

where $\beta_{ij} \in \{0, \dots, p-1\}$, “+” denotes ordinary addition in $\mathbb{C}^n$, and $\bar{\sigma}$ is a natural embedding map from $(\mathbb{Z}/(p))^n$ to

$\{0, \dots, p-1\}^n$. It is easy to see that the lattice defined by $\Lambda' \triangleq \{p^a \mathbf{r} : \mathbf{r} \in \mathbb{Z}^n\}$ is a sublattice of Λ . Hence, we obtain a $\mathbb{Z}$ -lattice partition Λ/Λ' from the nested linear codes $\{\mathcal{C}_i, 0 \leq i \leq a\}$.

Next we lift this $\mathbb{Z}$ -lattice partition Λ/Λ' to a $\mathbb{Z}[i]$ -lattice partition $\bar{\Lambda}/\bar{\Lambda}'$ using the procedure in Example 3. That is, we set $\bar{\Lambda} = \Lambda + i\Lambda$ and $\bar{\Lambda}' = \Lambda' + i\Lambda'$. In this way, we obtain a $\mathbb{Z}[i]$ -lattice partition $\bar{\Lambda}/\bar{\Lambda}'$.

In Appendix A, we show that there exist two generator matrices $\mathbf{G}_{\bar{\Lambda}}$ and $\mathbf{G}_{\bar{\Lambda}'}$ satisfying

$$\mathbf{G}_{\bar{\Lambda}'} = \text{diag}(\underbrace{p, \dots, p}_{k_1-k_2}, \underbrace{p^2, \dots, p^2}_{k_2-k_3}, \dots, \underbrace{p^a, \dots, p^a}_{k_a}) \mathbf{G}_{\bar{\Lambda}}. \quad (14)$$

It follows from Theorem 6 that

$$\bar{\Lambda}/\bar{\Lambda}' \cong (\mathbb{Z}[i]/(p))^{k_1-k_2} \oplus (\mathbb{Z}[i]/(p^2))^{k_2-k_3} \oplus \dots \oplus (\mathbb{Z}[i]/(p^a))^{k_a}.$$

When $a = 1$, lifted Construction D reduces to lifted Construction A. ■

Our final example combines the ideas behind complex Construction A and lifted Construction D.

Example 6 (Complex Construction D): Let π be a prime in R . Let $\mathcal{C}_0 \supseteq \mathcal{C}_1 \supseteq \dots \supseteq \mathcal{C}_a$ be nested linear codes of length n over $R/(\pi)$, where $\mathcal{C}_i$ has parameters $[n, k_i]$ for $i = 0, \dots, a$, and $k_0 = n$. Without loss of generality, there exists a basis $\{\mathbf{g}_1, \dots, \mathbf{g}_n\}$ for $(R/(\pi))^n$ such that 1) $\mathbf{g}_1, \dots, \mathbf{g}_{k_i}$ span $\mathcal{C}_i$ for $i = 0, \dots, a$, and 2) if $\mathbf{G}$ denotes the matrix with rows $\mathbf{g}_1, \dots, \mathbf{g}_n$, some permutation of the rows of $\mathbf{G}$ forms an upper triangular matrix with diagonal elements equal to 1.

Using the nested linear codes $\{\mathcal{C}_i, 0 \leq i \leq a\}$, we define an R -lattice Λ as

$$\Lambda \triangleq \bigcup \left\{ \pi^a R^n + \sum_{i=1}^a \sum_{j=1}^{k_i} \pi^{a-i} \beta_{ij} \bar{\sigma}(\mathbf{g}_j) : \beta_{ij} \in A_{\pi} \right\}$$

where A_{π} is a system of coset representatives for $R/(\pi)$, “+” denotes ordinary addition in $\mathbb{C}^n$, and $\bar{\sigma}$ is an embedding map from $(R/(\pi))^n$ to A_{π}^n . It is easy to verify that the lattice defined by $\Lambda' \triangleq \{\pi^a \mathbf{r} : \mathbf{r} \in R^n\}$ is a sublattice of Λ . Hence, we obtain an R -lattice partition Λ/Λ' from the nested linear codes $\{\mathcal{C}_i, 0 \leq i \leq a\}$.

Similar to Example 5, we have $\Lambda/\Lambda' \cong (R/(\pi))^{k_1-k_2} \oplus (R/(\pi^2))^{k_2-k_3} \oplus \dots \oplus (R/(\pi^a))^{k_a}$. When $a = 1$, complex Construction D reduces to complex Construction A. ■

Note that when a lattice partition is isomorphic to a vector space or a direct sum of two vector spaces (e.g., those in Example 3 and Example 4), it is convenient to implement random linear network coding at Layer 2, since many of the useful techniques (e.g., the use of headers for non-coherent network coding) from the network coding literature can be applied in a straightforward way. When a lattice partition has a more complicated structure (e.g., those in Example 5 and Example 6), the implementation of random linear network coding requires some modification, as discussed in the next section.

E. Non-Coherent LNC

Recall that “headers” are usually used to implement random linear network coding at Layer 2 in non-coherent settings. In

this section, we discuss how to design “headers” for a message space which is more complicated than a vector space.

Consider a general message space $W = R/(\pi_1) \oplus R/(\pi_2) \oplus \cdots \oplus R/(\pi_k)$, where $\pi_1 \mid \pi_2 \mid \cdots \mid \pi_k$. We propose to use the first $k - P$ summands to store payloads and to use the last P summands to store headers, where P denotes the number of packets in a generation. In other words, the “payload space” W_{payload} is given by

$$W_{\text{payload}} = R/(\pi_1) \oplus \cdots \oplus R/(\pi_{k-P})$$

and the “header space” W_{header} is given by

$$W_{\text{header}} = R/(\pi_{k-P+1}) \oplus \cdots \oplus R/(\pi_k).$$

It is easy to see the annihilator $\text{Ann}(W_{\text{payload}})$ of the payload space is given by $\text{Ann}(W_{\text{payload}}) = (\pi_{k-P})$. Hence, the payload space W_{payload} can be regarded as an $R/(\pi_j)$ -module, for every $j \geq k - P$, since $(\pi_j) \subseteq \text{Ann}(W_{\text{payload}})$. This implies that there is no loss of information when a network-coding coefficient is stored over $R/(\pi_j)$ rather than over R .

The use of headers incurs some overhead. If headers are not used, then the last P summands can be used to store payloads, leading to additional $\sum_{j=k-P+1}^k \log_2 |R/(\pi_j)|$ bits for storing payloads. Hence, the normalized redundancy of headers can be defined as

$$\frac{\sum_{j=k-P+1}^k \log_2 |R/(\pi_j)|}{\sum_{j=1}^k \log_2 |R/(\pi_j)|}.$$

This quantity is minimized for lattice partitions with $(\pi_1) = \cdots = (\pi_k)$, which we call *uniform lattice partitions*. Uniform lattice partitions are good candidates for applications in which the normalized redundancy of headers is a major concern. We note that the lattice partitions in Example 3 and Example 4 are uniform lattice partitions, while the lattice partitions in Example 5 and Example 6 are not uniform lattice partitions in general.

V. PERFORMANCE ANALYSIS FOR LATTICE NETWORK CODING

In this section, we turn from algebra to geometry, presenting an error-probability analysis as well as its implications.

A. Error Probability for LNC

According to Proposition 1, the linear function $\mathbf{u}$ is decoded correctly if and only if $\mathcal{D}_\Lambda(\mathbf{n}) \in \Lambda'$; thus, the error probability for the basic setup is given by

$$P_e(\mathbf{h}, \mathbf{a}) = \Pr[\mathcal{D}_\Lambda(\mathbf{n}) \notin \Lambda'],$$

where $\mathbf{n} = \sum_{\ell=1}^L (\alpha h_\ell - a_\ell) \mathbf{x}_\ell + \alpha \mathbf{z}$ is the effective noise. Note that the effective noise $\mathbf{n}$ is not necessarily Gaussian, making the analysis nontrivial. To alleviate this difficulty, we focus on a special case in which the shaping region (Voronoi region) $\mathcal{V}(\Lambda')$ is a (rotated) hypercube in $\mathbb{C}^n$, i.e.,

$$\mathcal{V}(\Lambda') = \gamma \mathbf{U} \mathcal{H}_n$$

where $\gamma > 0$ is a scalar factor, $\mathbf{U}$ is any $n \times n$ unitary matrix, and $\mathcal{H}_n$ is a unit hypercube in $\mathbb{C}^n$ defined by $\mathcal{H}_n =$

$([-1/2, 1/2] + i[-1/2, 1/2])^n$. This corresponds to so-called *hypercube shaping* in [39]. We note that all of our previous examples of lattice partitions admit hypercube shaping. The assumption of hypercube shaping not only simplifies the analysis of error probability, but also has some practical advantages, for example, the complexity of the shaping operation is low (however, there is no shaping gain [33], [39]). In the sequel, we will provide an approximate upper bound for the error probability for LNC schemes that admit hypercube shaping. This upper bound is closely related to certain geometrical parameters of a lattice partition as defined below.

The *inter-coset distance* $d(\boldsymbol{\lambda}_1 + \Lambda', \boldsymbol{\lambda}_2 + \Lambda')$ between two cosets $\boldsymbol{\lambda}_1 + \Lambda', \boldsymbol{\lambda}_2 + \Lambda'$ of Λ/Λ' is defined as

$$d(\boldsymbol{\lambda}_1 + \Lambda', \boldsymbol{\lambda}_2 + \Lambda') \triangleq \min\{\|\mathbf{x}_1 - \mathbf{x}_2\| : \mathbf{x}_1 \in \boldsymbol{\lambda}_1 + \Lambda', \mathbf{x}_2 \in \boldsymbol{\lambda}_2 + \Lambda'\}.$$

Clearly, $d(\boldsymbol{\lambda}_1 + \Lambda', \boldsymbol{\lambda}_2 + \Lambda') = 0$ if and only if $\boldsymbol{\lambda}_1 + \Lambda' = \boldsymbol{\lambda}_2 + \Lambda'$.

The *minimum inter-coset distance* $d(\Lambda/\Lambda')$ of Λ/Λ' is thus defined as

$$d(\Lambda/\Lambda') \triangleq \min\{d(\boldsymbol{\lambda}_1 + \Lambda', \boldsymbol{\lambda}_2 + \Lambda') : \boldsymbol{\lambda}_1 + \Lambda' \neq \boldsymbol{\lambda}_2 + \Lambda'\}.$$

Let the set difference $\Lambda \setminus \Lambda' = \{\boldsymbol{\lambda} \in \Lambda : \boldsymbol{\lambda} \notin \Lambda'\}$. Then $d(\Lambda/\Lambda')$ corresponds to the length of the shortest vectors in the set difference $\Lambda \setminus \Lambda'$. Denote by $K(\Lambda/\Lambda')$ the number of these shortest vectors.

An element $\mathbf{x}$ in a coset $\boldsymbol{\lambda} + \Lambda'$ is called a *coset leader* if $\|\mathbf{x}\| \leq \|\mathbf{y}\|$ for all $\mathbf{y} \in \boldsymbol{\lambda} + \Lambda'$.

1) *Error analysis for the basic setup*: We have the following union bound estimate (UBE) of the error probability.

Theorem 7 (Probability of Decoding Error): Assume hypercube shaping is used for Λ/Λ' . Let $\mathbf{u}$ be a predetermined linear function. Then the union bound estimate of the probability of decoding error is

$$P_e(\mathbf{h}, \mathbf{a}) \approx K(\Lambda/\Lambda') \exp\left(-\frac{d^2(\Lambda/\Lambda')}{4N_0Q(\alpha, \mathbf{a})}\right),$$

where $\mathbf{a} \in R^L$ ($\mathbf{a} \neq \mathbf{0}$) is the coefficient vector for $\mathbf{u}$, $\alpha \in \mathbb{C}$ is the scalar, and the parameter $Q(\alpha, \mathbf{a})$ is given by

$$Q(\alpha, \mathbf{a}) = |\alpha|^2 + \text{SNR} \|\alpha \mathbf{h} - \mathbf{a}\|^2. \quad (15)$$

The proof is given in Appendix B.

Theorem 7 has the following important implications.

- 1) The scalar α should be chosen such that $Q(\alpha, \mathbf{a})$ is minimized;
- 2) The lattice partition Λ/Λ' should be designed such that $K(\Lambda/\Lambda')$ is minimized and $d(\Lambda/\Lambda')$ is maximized.

These two implications will be discussed fully in Sec. V-B and Sec. V-C. Here, we point out that, under hypercube shaping, the effective noise $\mathbf{n}$ is a random vector with i.i.d. components of variance $N_0Q(\alpha, \mathbf{a})$. Hence, the first implication can be interpreted as a *minimum variance criterion*.

2) *Error analysis for the extended setup*: Once the coefficient vectors $\mathbf{a}_1, \dots, \mathbf{a}_m$ (for the linear functions $\mathbf{u}_1, \dots, \mathbf{u}_m$) are chosen by the receiver, the following corollary follows immediately from Theorem 7.

Corollary 1: Assume hypercube shaping is used for Λ/Λ' . Then for each linear function $\mathbf{u}_i$, the union bound estimate of the probability of decoding error is

$$P_e(\mathbf{h}, \mathbf{a}_i) \approx K(\Lambda/\Lambda') \exp\left(-\frac{d^2(\Lambda/\Lambda')}{4N_0Q(\alpha_i, \mathbf{a}_i)}\right),$$

where $\mathbf{a}_i \in R^L$ ($\mathbf{a}_i \neq \mathbf{0}$) is the coefficient vector for $\mathbf{u}_i$, $\alpha_i \in \mathbb{C}$ is the scalar for $\mathbf{u}_i$.

Recall that the linear combinations $\mathbf{u}_1, \dots, \mathbf{u}_m$ should be linearly independent. Thus, Corollary 1 suggests that each coefficient vector $\mathbf{a}_i$ should be chosen such that each $Q(\alpha_i, \mathbf{a}_i)$ is as small as possible under the constraint that $\mathbf{u}_1, \dots, \mathbf{u}_m$ are linearly independent. This can be regarded as a *constrained minimum variance criterion*, which will be explored next.

B. Choice of Receiver Parameters

In the previous section, we derive a minimum variance criterion and a constrained minimum variance criterion for choosing receiver parameters. In this section, we will apply these criteria to develop explicit algorithms for choosing receiver parameters. In particular, we will show that 1) choosing a single coefficient vector is a shortest vector problem, and 2) choosing multiple coefficient vectors is related to sphere-decoding algorithms and lattice-reduction algorithms.

1) *Choice of the scalar α :* We note that the minimum variance criterion is equivalent to the maximum computation-rate criterion in [14]. Hence, the results in [14] can be carried over here directly.

Proposition 2 ([14]): For a predetermined coefficient vector $\mathbf{a} \in R^L$ ($\mathbf{a} \neq \mathbf{0}$), the optimal scalar α , denoted by α_{opt} , is given by

$$\alpha_{\text{opt}} = \frac{\mathbf{a}\mathbf{h}^H\text{SNR}}{\text{SNR}\|\mathbf{h}\|^2 + 1}. \quad (16)$$

2) *Choice of a single coefficient vector:* Suppose the receiver has the freedom to choose a single coefficient vector. By Proposition 2, for any coefficient vector $\mathbf{a}$, the corresponding optimal parameter $Q(\alpha_{\text{opt}}, \mathbf{a})$ is equal to $\mathbf{a}\mathbf{M}\mathbf{a}^H$, where the matrix $\mathbf{M}$ is

$$\mathbf{M} = \text{SNR}\mathbf{I}_L - \frac{\text{SNR}^2}{\text{SNR}\|\mathbf{h}\|^2 + 1}\mathbf{h}\mathbf{h}^H.$$

Observe that the matrix $\mathbf{M}$ is Hermitian and positive-definite. Hence, $\mathbf{M}$ has a Cholesky decomposition $\mathbf{M} = \mathbf{L}\mathbf{L}^H$, where $\mathbf{L}$ is a lower triangular matrix. It follows that

$$Q(\alpha_{\text{opt}}, \mathbf{a}) = \mathbf{a}\mathbf{M}\mathbf{a}^H = \|\mathbf{a}\mathbf{L}\|^2.$$

Thus, finding an optimal coefficient vector $\mathbf{a}$ is equivalent to solving the shortest vector problem

$$\mathbf{a}_{\text{opt}} = \arg \min_{\mathbf{a} \neq \mathbf{0}} \|\mathbf{a}\mathbf{L}\|. \quad (17)$$

3) *Choice of multiple coefficient vectors:* Suppose the receiver has the freedom to choose m coefficient vectors. Then these coefficient vectors $\mathbf{a}_1, \dots, \mathbf{a}_m$ should be chosen such that each $Q(\alpha_i, \mathbf{a}_i) = \|\mathbf{a}_i\mathbf{L}\|^2$ is as small as possible under the constraint that $\mathbf{u}_1, \dots, \mathbf{u}_m$ are linearly independent. We will show that, for lattice partitions constructed in Section IV-D,

there exists a feasible solution of $\{\mathbf{a}_1, \dots, \mathbf{a}_m\}$ that simultaneously optimizes each $\|\mathbf{a}_i\mathbf{L}\|$. We call such feasible solutions *dominated solutions*, as defined below.

Definition 2 (Dominated Solutions): A feasible solution $\mathbf{a}_1, \dots, \mathbf{a}_m$ (with $\|\mathbf{a}_1\mathbf{L}\| \leq \dots \leq \|\mathbf{a}_m\mathbf{L}\|$) is called a *dominated solution* if for any feasible solution $\mathbf{a}'_1, \dots, \mathbf{a}'_m$ (with $\|\mathbf{a}'_1\mathbf{L}\| \leq \dots \leq \|\mathbf{a}'_m\mathbf{L}\|$), the following inequalities hold

$$\|\mathbf{a}_i\mathbf{L}\| \leq \|\mathbf{a}'_i\mathbf{L}\|, \quad i = 1, \dots, m.$$

We will show the existence of dominated solutions for lattice partitions constructed in Section IV-D. For ease of presentation, we mainly focus on lattice partitions obtained from complex Construction A here, since similar methods apply to other constructions as well. Note that for complex Construction A, the linear independence of $\mathbf{u}_1, \dots, \mathbf{u}_m \in (R/(\pi))^k$ implies the linear independence of $\bar{\mathbf{a}}_1, \dots, \bar{\mathbf{a}}_m \in (R/(\pi))^L$, where $\bar{\mathbf{a}}_i$ is the natural projection of $\mathbf{a}_i$. The existence of dominated solutions is proven in the following theorem.

Theorem 8: A feasible solution $\{\mathbf{a}_1, \dots, \mathbf{a}_m\}$ defined by

$$\begin{aligned} \mathbf{a}_1 &= \arg \min \{\|\mathbf{a}\mathbf{L}\| \mid \bar{\mathbf{a}} \text{ is nonzero}\} \\ \mathbf{a}_2 &= \arg \min \{\|\mathbf{a}\mathbf{L}\| \mid \bar{\mathbf{a}}, \bar{\mathbf{a}}_1 \text{ are linearly independent}\} \\ &\vdots \\ \mathbf{a}_m &= \arg \min \{\|\mathbf{a}\mathbf{L}\| \mid \bar{\mathbf{a}}, \bar{\mathbf{a}}_1, \dots, \bar{\mathbf{a}}_{m-1} \text{ are linearly independent}\} \end{aligned}$$

always exists, and is a dominated solution.

The proof is given in Appendix C.

4) *Finding dominated solutions:* We now propose a method of finding a dominated solution, which consists of three steps. In the first step, we construct a ball $\mathcal{B}(\rho) = \{\mathbf{x} \in \mathbb{C}^L \mid \|\mathbf{x}\| \leq \rho\}$ that contains m lattice points $\mathbf{v}_1\mathbf{L}, \dots, \mathbf{v}_m\mathbf{L}$ such that $\bar{\mathbf{v}}_1, \dots, \bar{\mathbf{v}}_m$ are linearly independent. In the second step, we order all lattice points within $\mathcal{B}(\rho)$ based on their lengths, producing an ordered set $\mathcal{S}_\rho$ with $\|\mathbf{v}_1\mathbf{L}\| \leq \|\mathbf{v}_2\mathbf{L}\| \leq \dots \leq \|\mathbf{v}_{|\mathcal{S}_\rho|}\mathbf{L}\|$. Finally, we find a dominated solution $\{\mathbf{a}_1, \dots, \mathbf{a}_m\}$ by using a greedy search algorithm given as Algorithm 1.

Algorithm 1 A greedy search algorithm

Input: An ordered set $\mathcal{S}_\rho = \{\mathbf{v}_1\mathbf{L}, \mathbf{v}_2\mathbf{L}, \dots, \mathbf{v}_{|\mathcal{S}_\rho|}\mathbf{L}\}$ with $\|\mathbf{v}_1\mathbf{L}\| \leq \|\mathbf{v}_2\mathbf{L}\| \leq \dots \leq \|\mathbf{v}_{|\mathcal{S}_\rho|}\mathbf{L}\|$.

Output: An optimal solution $\{\mathbf{a}_1, \dots, \mathbf{a}_m\}$.

1. Set $\mathbf{a}_1 = \mathbf{v}_1$. Set $i = 1$ and $j = 1$.
 2. **while** $i < |\mathcal{S}_\rho|$ and $j < m$ **do**
 3. Set $i = i + 1$.
 4. **if** $\bar{\mathbf{v}}_i, \bar{\mathbf{a}}_1, \dots, \bar{\mathbf{a}}_j$ are linearly independent **then**
 5. Set $j = j + 1$. Set $\mathbf{a}_j = \mathbf{v}_i$.
 6. **end if**
 7. **end while**
-

The correctness of our proposed method follows immediately from Theorem 8. Our proposed method is in the spirit of sphere-decoding algorithms, since sphere-decoding algorithms also enumerate all lattice points within a ball centered at a given vector. The selection of the radius ρ plays an important role here, just as it does for sphere-decoding algorithms. If ρ is too large, then the second step may incur excessive

computations. If ρ is too small, then the first step may fail to construct a ball that contains m linearly independent $\bar{\mathbf{v}}_1, \dots, \bar{\mathbf{v}}_m$.

As shown in the following proposition, lattice-reduction algorithms may be used to determine an appropriate radius ρ , like the Lenstra-Lenstra-Lovász (LLL) algorithm that is used in sphere decoding.

Proposition 3: Let $\{\mathbf{b}_1, \dots, \mathbf{b}_L\}$ be a reduced basis [40] for $\mathbf{L}$. If ρ is set to be $\|\mathbf{b}_m\|$, then the set $\mathcal{S}_\rho$ contains at least m lattice points $\mathbf{v}_1\mathbf{L}, \dots, \mathbf{v}_m\mathbf{L}$ such that $\bar{\mathbf{v}}_1, \dots, \bar{\mathbf{v}}_m$ are linearly independent.

Proof: Let $\mathbf{v}_i = \mathbf{b}_i\mathbf{L}^{-1}$ for $i = 1, \dots, L$. Let $\mathbf{V}$ be an $L \times L$ matrix with $\mathbf{v}_i$ as its i th row. Since $\{\mathbf{b}_1, \dots, \mathbf{b}_L\}$ is a reduced basis, it follows that the matrix $\mathbf{V}$ is invertible. In particular, $\bar{\mathbf{v}}_1, \dots, \bar{\mathbf{v}}_m$ are linearly independent for all integers $m \leq L$. ■

There are many existing lattice-reduction algorithms in the literature. Among them, the LLL reduction algorithm is of particular importance. Recently, the LLL reduction algorithm has been extended from real lattices ($\mathbb{Z}$ -lattices) to $\mathbb{Z}[i]$ -lattices [41]. Unfortunately, there exist no LLL reduction algorithms for general R -lattices to the best of our knowledge; the design of such reduction algorithms is left as future work.

For the special case when $R = \mathbb{Z}[i]$ and $L = 2$, a dominated solution can be computed very quickly and efficiently by using the lattice-reduction algorithm proposed in [42] in the context of MIMO communication.

C. Design of Lattice Partitions

In Sec. V-A, we show that the lattice partition Λ/Λ' should be designed such that $K(\Lambda/\Lambda')$ is minimized and $d(\Lambda/\Lambda')$ is maximized. These criteria apply to both the basic setup and the extended setup under hypercube shaping. In this section, we first introduce a notion of nominal coding gain for an LNC scheme, which characterizes the performance improvement over the baseline LNC scheme. We then discuss how to design lattice partitions with large nominal coding gains.

1) *Nominal coding gain for LNC:* Recall that Nazer-Gastpar's result for the basic setup can be rewritten as $R_{\text{mes}} = \log(\text{SNR}/Q(\alpha, \mathbf{a}))$ when $\text{SNR} \geq Q(\alpha, \mathbf{a})$. Observe that $\text{SNR}/Q(\alpha, \mathbf{a}) = P/(N_0Q(\alpha, \mathbf{a}))$, where $N_0Q(\alpha, \mathbf{a})$ is the variance of the effective noise $\mathbf{n}$ under hypercube shaping. These facts suggest defining the *signal-to-effective-noise ratio*

$$\text{SENR} = \frac{\text{SNR}}{Q(\alpha, \mathbf{a})}$$

and the *normalized signal-to-effective-noise ratio*

$$\text{SENR}_{\text{norm}} = \frac{\text{SENR}}{2^{R_{\text{mes}}}} = \frac{\text{SNR}}{2^{R_{\text{mes}}}Q(\alpha, \mathbf{a})},$$

where R_{mes} is the actual message rate of an LNC scheme.

For the Nazer-Gastpar scheme, $\text{SENR}_{\text{norm}} = 1$ (0 dB) when $\text{SNR} \geq Q(\alpha, \mathbf{a})$. Thus, the value of $\text{SENR}_{\text{norm}}$ for an LNC scheme signifies how far this LNC scheme is operating from the Nazer-Gastpar scheme in the high-SNR regime.

Recall that the UBE for an LNC scheme in the basic setup is given by

$$P_e(\mathbf{h}, \mathbf{a}) \approx K(\Lambda/\Lambda') \exp\left(-\frac{d^2(\Lambda/\Lambda')}{4N_0Q(\alpha, \mathbf{a})}\right),$$

for high signal-to-noise ratios. Note that $\text{SENR}_{\text{norm}} = P/(N_0Q(\alpha, \mathbf{a})2^{R_{\text{mes}}})$, $2^{nR_{\text{mes}}} = V(\Lambda')/V(\Lambda)$, and $V(\Lambda') = \gamma^{2n} = (6P)^n$ (due to hypercube shaping). Combining these results, we obtain

$$P_e(\mathbf{h}, \mathbf{a}) \approx K(\Lambda/\Lambda') \exp\left(-\frac{\gamma_c(\Lambda/\Lambda')3\text{SENR}_{\text{norm}}}{2}\right),$$

where $\gamma_c(\Lambda/\Lambda') \triangleq d^2(\Lambda/\Lambda')/V(\Lambda)^{1/n}$ is the *nominal coding gain* of Λ/Λ' .

For a baseline lattice partition (i.e., $\Lambda/\Lambda' = \mathbb{Z}[i]^n/\pi\mathbb{Z}[i]^n$ for some $\pi \in \mathbb{Z}[i]$), the nominal coding gain equals to 1. Thus, the nominal coding gain provides a first-order estimate of the performance improvement of an LNC scheme over the baseline LNC scheme in terms of $\text{SENR}_{\text{norm}}$.

2) *Lattice partitions with large nominal coding gains:* In this section, we illustrate how to design lattice partitions with large nominal coding gains. We use complex Construction A as a particular example, since similar methods can be applied to other constructions as well. Recall that complex Construction A produces a lattice partition Λ_C/Λ'_C from a linear code $\mathcal{C}$. To optimize the nominal coding gain $\gamma_c(\Lambda_C/\Lambda'_C)$ for Λ_C/Λ'_C , we first relate $\gamma_c(\Lambda_C/\Lambda'_C)$ to certain parameters of the linear code $\mathcal{C}$.

Let π be a prime in $\mathbb{Z}[i]$ with $|\pi|^2 > 2$. To each codeword $\mathbf{c} = (c_1 + (\pi), \dots, c_n + (\pi)) \in \mathcal{C}$, there corresponds a coset $(c_1, \dots, c_n) + \pi\mathbb{Z}[i]^n$, we denote by $\langle \mathbf{c} \rangle$ a coset leader. It is easy to check that $\langle \mathbf{c} \rangle$ is uniquely given by

$$\langle \mathbf{c} \rangle = (c_1 - \lfloor c_1/\pi \rfloor \times \pi, \dots, c_n - \lfloor c_n/\pi \rfloor \times \pi), \quad (18)$$

where $\lfloor x \rfloor$ is a rounding operation that sends $x \in \mathbb{C}$ to the closest Gaussian integer in the Euclidean distance. The Euclidean weight $w_E(\mathbf{c})$ of $\mathbf{c}$ can then be defined as the squared Euclidean norm of $\langle \mathbf{c} \rangle$, that is, $w_E(\mathbf{c}) = \|\langle \mathbf{c} \rangle\|^2$. Let $w_E^{\min}(\mathcal{C})$ be the minimum Euclidean weight of nonzero codewords in $\mathcal{C}$, i.e.,

$$w_E^{\min}(\mathcal{C}) = \min\{w_E(\mathbf{c}) : \mathbf{c} \neq \mathbf{0}, \mathbf{c} \in \mathcal{C}\}.$$

Then we have the following result.

Proposition 4: Let $\mathcal{C}$ be a linear code over $\mathbb{Z}[i]/(\pi)$ and let Λ_C/Λ'_C be a lattice partition constructed from $\mathcal{C}$ using complex construction A. Then

$$\gamma_c(\Lambda_C/\Lambda'_C) = \frac{w_E^{\min}(\mathcal{C})}{|\pi|^{2(1-k/n)}}.$$

The proof is in Appendix D.

Proposition 4 suggests that optimizing the nominal coding gain $\gamma_c(\Lambda_C/\Lambda'_C)$ of Λ_C/Λ'_C amounts to maximizing the minimum Euclidean weight $w_E^{\min}(\mathcal{C})$ of $\mathcal{C}$. In the sequel, we propose two simple methods for constructing linear codes with large $w_E^{\min}(\mathcal{C})$.

The first method applies to (terminated) convolutional codes. Recall that convolutional codes with large free distances can be found through simple computer searches. Thus, terminated convolutional codes with large minimum Euclidean weights can be found in an analogous way. A concrete example of this method will be given in Section VI-A. The second method applies to linear codes over “small” field $\mathbb{Z}[i]/(\pi)$. Note that the minimum Euclidean weight $w_E^{\min}(\mathcal{C})$ of a linear

code $\mathcal{C}$ is lower-bounded by its minimum Hamming weight $w_H^{\min}(\mathcal{C})$, i.e., $w_E^{\min}(\mathcal{C}) \geq w_H^{\min}(\mathcal{C})$. The smaller the field size is, the tighter the lower bound would be. Hence, codes with large $w_H^{\min}(\mathcal{C})$ implies codes with large $w_E^{\min}(\mathcal{C})$. This fact can be used to construct good (not necessarily optimal) linear codes over small $\mathbb{Z}[i]/(\pi)$.

VI. DESIGN EXAMPLES AND SIMULATION RESULTS

A. Design Examples

In this section, we provide two concrete design examples of practical LNC schemes based on complex Construction A and lifted Construction D. The purpose of our design examples is to demonstrate the potential of LNC schemes in practical settings rather than to construct powerful LNC schemes that approach the performance of the Nazer-Gastpar scheme. As such, all of our design examples feature short packet length and reasonable decoding complexity. In particular, we will show that, under these practical constraints, a nominal coding gain of 3 to 5 dB is easily obtained. (A more elaborate scheme, based on signal codes [25], is described in [26].)

Example 7: Consider a rate-1/2 terminated (feed-forward) convolutional code over $\mathbb{Z}[i]/(3)$ with ν memory elements. Suppose the input sequence $u(D)$ is a polynomial of degree less than μ . Then this terminated convolutional code can be regarded as a $[2(\mu+\nu), \mu]$ linear block code $\mathcal{C}$. Using complex Construction A as described in Example 4, we obtain a lattice partition $\Lambda_{\mathcal{C}}/\Lambda'_{\mathcal{C}}$.

Note that the minimum Euclidean weight $w_E^{\min}(\mathcal{C})$ of $\mathcal{C}$ can be bounded as

$$w_E^{\min}(\mathcal{C}) \leq 3(1 + \nu),$$

for all rate-1/2 terminated (feed-forward) convolutional codes over $\mathbb{Z}[i]/(3)$. This upper bound can be verified by considering the input sequence $u(D) = 1$. Hence, the nominal coding gain $\gamma_c(\Lambda_{\mathcal{C}}/\Lambda'_{\mathcal{C}})$ satisfies

$$\gamma_c(\Lambda_{\mathcal{C}}/\Lambda'_{\mathcal{C}}) \leq 1 + \nu.$$

When $\nu = 1, 2$ and $\mu \gg \nu$, this upper bound can be asymptotically achieved by polynomial convolutional encoders shown in Table I.

TABLE I
POLYNOMIAL CONVOLUTIONAL ENCODERS THAT ASYMPTOTICALLY
ACHIEVE THE UPPER BOUND.

ν	$\mathbf{g}(D)$	$\gamma_c(\Lambda_{\mathcal{C}}/\Lambda'_{\mathcal{C}})$
1	$[1 + (1+i)D, (1+i) + D]$	2 (3 dB)
2	$[1 + D + (1+i)D^2, (1+i) + (1-i)D + D^2]$	3 (4.77 dB)

Note that when $\nu = 1$ or 2, the encoder state space size is 9 or 81. Note also that the lattice decoder $\mathcal{D}_{\Lambda_{\mathcal{C}}}$ can be implemented through a modified Viterbi decoder as discussed in Appendix E. Thus, this example demonstrates that a nominal coding gain of 3 to 5 dB can be easily obtained with reasonable decoding complexity. ■

Our next example is based on lifted Construction D.

Example 8: Consider nested linear codes $\mathcal{C}_0 \supseteq \mathcal{C}_1 \supseteq \mathcal{C}_2$ of length n over $\mathbb{Z}/(2)$, where both $\mathcal{C}_0$ and $\mathcal{C}_1$ are the $[n, n]$ trivial code, and $\mathcal{C}_2$ is a $[n, k_2, d_2]$ code. Using lifted Construction D as described in Example 5, we obtain a lattice partition $\bar{\Lambda}/\bar{\Lambda}'$.

Note that the minimum inter-coset distance $d(\bar{\Lambda}/\bar{\Lambda}') \leq 2$ for all linear $[n, k_2, d_2]$ codes over $\mathbb{Z}/(2)$, since $(2, 0, \dots, 0)$ is a lattice point in $\bar{\Lambda}$ (but not in $\bar{\Lambda}'$). Note also that $V(\bar{\Lambda}') = V(\bar{\Lambda})4^{n+k_2}$ and that $V(\bar{\Lambda}) = 4^{2n}$. Hence, the nominal coding gain $\gamma_c(\bar{\Lambda}/\bar{\Lambda}')$ satisfies

$$\gamma_c(\bar{\Lambda}/\bar{\Lambda}') \leq 4/4^{(1-k_2/n)}.$$

It is well known (e.g., [35]) that when $d_2 \geq 4$, $d(\bar{\Lambda}/\bar{\Lambda}') = 2$. Thus, the upper bound for the nominal coding gain can be achieved by choosing an $[n, k_2, d_2]$ code with $d_2 \geq 4$. Table II lists several extended Hamming codes with $d = 4$ as well as the corresponding nominal coding gains (if they are used as $\mathcal{C}_2$). ■

TABLE II
SEVERAL EXTENDED HAMMING CODES AND CORRESPONDING NOMINAL
CODING GAINS.

n	k	$\gamma_c(\bar{\Lambda}/\bar{\Lambda}')$
32	26	3.08 (4.89 dB)
64	57	3.44 (5.36 dB)
128	120	3.67 (5.64 dB)
256	247	3.81 (5.81 dB)

We note that Ordentlich-Erez's construction in [43] can be regarded as a special case of Example 8. In their construction, $\mathcal{C}_2$ is chosen as a rate 5/6 cyclic LDPC code of length 64800. Example 8 suggests that their nominal coding gain is upper bounded by $4/4^{1/6}$ (5.02 dB). Example 8 also suggests that, to further improve the nominal coding gain, $\mathcal{C}_2$ may be chosen as a [256, 247] extended Hamming code or $\mathcal{C}_1$ may be chosen as a non-trivial code.

B. Simulation Results

As described in Section I, there are many potential application scenarios for LNC, the most promising of which may involve multicasting from one (or more) sources to multiple destinations via a wireless relay network. Since we wish to avoid introducing higher-layer issues (e.g., scheduling), in this paper, we focus here on a two-transmitter, single receiver multiple-access configuration, which may be regarded as a building block component of a more complicated and realistic network application. In particular, we focus on the following three scenarios:

- 1) The channel gains are fixed; the receiver chooses a single linear function.
- 2) The channel gains are Rayleigh faded; the receiver chooses a single linear function.
- 3) The channel gains are Rayleigh faded; the receiver chooses two linear functions.

In each scenario, we evaluate the performance of four LNC schemes, namely, the Nazer-Gastpar scheme, two LNC schemes ($\nu = 1, 2$) proposed in Example 7, and the baseline LNC scheme over $\mathbb{Z}[i]/(3)$ as defined in Sec. V-C. Since we are interested in LNC schemes with short packet lengths, each transmitted signal consists of 200 complex symbols in our simulations.


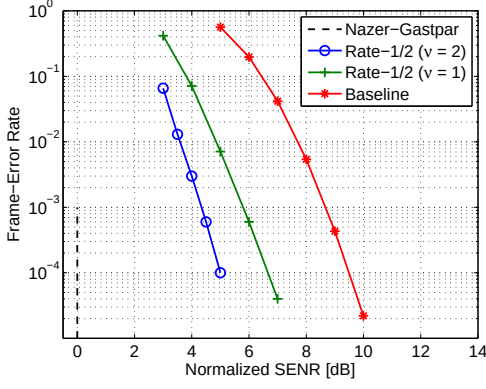


Fig. 3. Error Performance of four LNC schemes in Scenario 1.


1) *Scenario 1 (fixed channel gains; single coefficient vector)*: Fig. 3 depicts the frame-error rates of the four LNC schemes as a function of $\text{SENR}_{\text{norm}}$. Here the channel-gain vector $\mathbf{h}$ is set to $\mathbf{h} = [-1.17 + 2.15i \ 1.25 - 1.63i]$; this is precisely the same fixed channel-gain vector used in [14] which facilitates comparisons. However, as we have shown in Sec. V-C, the results are not particularly sensitive to the choice for $\mathbf{h}$; similar results are achieved for other fixed choices for $\mathbf{h}$. For the Nazer-Gastpar scheme, we have $\text{SENR}_{\text{norm}} = 1$ (0 dB) when $\text{SNR} \geq Q(\alpha, \mathbf{a})$, as explained in Sec. V-C. For the two LNC schemes proposed in Example 7, the parameter $\mu + \nu$ is set to 100. Thus, each transmitted signal consists of 200 complex symbols. For the baseline LNC scheme, the lattice partition is set to $\mathbb{Z}[i]^{200}/3\mathbb{Z}[i]^{200}$. From Fig. 3, we observe that a nominal coding gain of 3 to 5 dB can be achieved by using a (modified) Viterbi decoder with state space of size 9 or 81.

2) *Scenario 2 (Rayleigh faded channel gains; single coefficient vector)*: Fig. 4(a) shows the frame-error rates of three LNC schemes as a function of SNR. For the two LNC schemes proposed in Example 7, the parameter $\mu + \nu$ is again set to 100 for the same reason. In this case, the corresponding message rates are $\frac{99}{100} \log_2(3)$ ($\nu = 1$) and $\frac{98}{100} \log_2(3)$ ($\nu = 2$), respectively. To make a fair comparison, the message rate of the Nazer-Gastpar scheme is set to $\log_2(3)$, which is quite close to the previous two message rates. The decoding rule for the Nazer-Gastpar scheme is as follows: a frame error occurs if and only if $\log_2(3) \geq \log_2(\text{SNR}/Q(\alpha, \mathbf{a}))$, where $\mathbf{a}$ is the single coefficient vector. As seen in Fig. 4(a), the gap to the Nazer-Gastpar scheme is around 5 dB at an error-rate of 1%.

Fig. 4(b) shows the frame-error rates of the baseline LNC scheme (over $\mathbb{Z}[i]^{200}/3\mathbb{Z}[i]^{200}$) and the 9-QAM PNC scheme described in Example 2. For the 9-QAM scheme, the coefficient vector $\mathbf{a}$ is set to $[1 \ 1]$ as explained in Example 2. To make a fair comparison, the coefficient vector $\mathbf{a}$ in the baseline LNC scheme satisfies $a_1 \neq 0, a_2 \neq 0$, which comes from the “exclusive law of network coding” as discussed in [7], [8]. As seen in Fig. 4(b), the baseline LNC scheme outperforms the 9-QAM scheme by more than 6 dB at an error-rate of 1%. In other words, even the baseline LNC scheme is able to effectively mitigate phase misalignment due to Rayleigh fading. Finally, note that Fig. 4(a) and Fig. 4(b) are separated

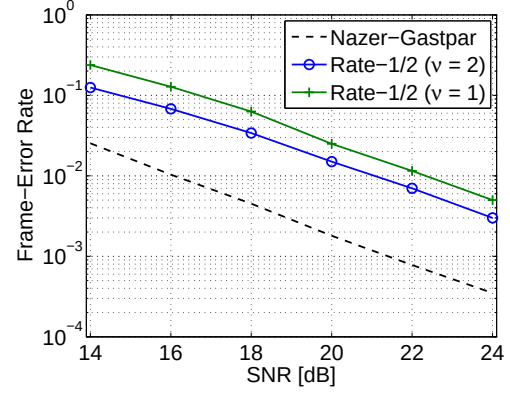

(a)

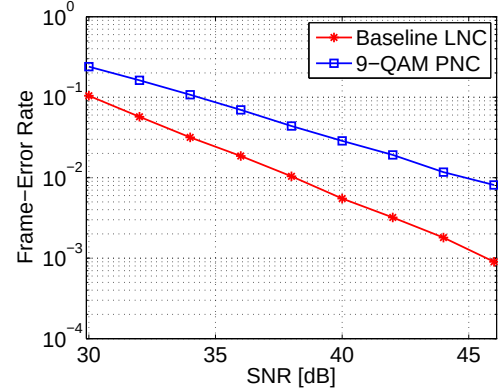

(b)

Fig. 4. Error Performance of various LNC schemes in Scenario 2.

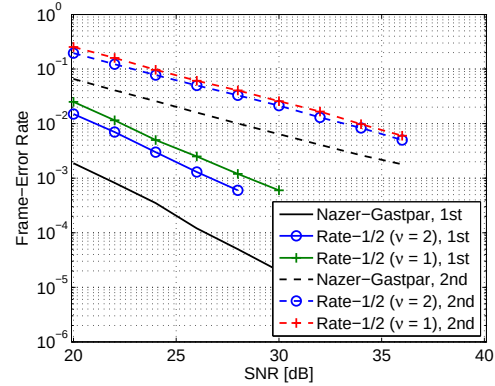


Fig. 5. Error Performance of three LNC schemes in Scenario 3.

because they have different message rates ($\log_2(3)$ in Fig. 4(a) and $\log_2(3)$ in Fig. 4(b)).

3) *Scenario 3 (Rayleigh faded channel gains; two coefficient vectors)*: Fig. 5 depicts the frame-error rates of three LNC schemes as a function of SNR. Here the two coefficient vectors are chosen by using the lattice-reduction algorithm proposed in [42]. The configurations for the three LNC schemes are precisely the same as those in Fig. 4(a). The frame-error rates for the first linear combination are depicted in solid lines, while the error rates for the second linear combination are depicted in dashed lines. From Fig. 5, we

observe similar trends of error rates as in Fig. 4(a). We also observe that the first linear combination is much more reliable than the second one.

VII. CONCLUSION

In this paper, the problem of constructing LNC schemes via practical, finite-dimensional, lattice partitions has been studied. A generic LNC scheme has been defined based on an arbitrary lattice partition. The message space of the generic scheme (in which random linear network coding is implemented) is isomorphic (as a module) to the underlying lattice partition, whose structure may be analyzed using the Smith normal form theorem. These results not only give rise to a convenient characterization of the message space of the Nazer-Gastpar scheme, but also lead to several generalized constructions of LNC schemes as well. All of these constructions are compatible with header-based random linear network coding, and the general approach is compatible with a wide variety of lattice-partition constructions going beyond Construction A.

A union bound estimate of the error probability for hypercube-shaped LNC schemes has been derived, showing that 1) the received parameters $\{\alpha_\ell, \mathbf{a}_\ell\}$ should be chosen such that each $Q(\alpha_\ell, \mathbf{a}_\ell)$ is minimized, and 2) the lattice partition Λ/Λ' should be designed such that $d(\Lambda/\Lambda')$ is maximized and $\mathcal{N}(\Lambda/\Lambda')$ is minimized. These criteria lead to explicit algorithms for choosing the receiver parameters, which are connected to some well-studied lattice problems, such as the shortest vector problem and the lattice reduction problem. These criteria also lead to several specific methods for optimizing lattice partitions. In particular, the nominal coding gain for lattice partitions has been introduced, which serves as an important figure of merit for comparing various LNC schemes. Finally, several concrete examples of practical LNC schemes have been provided, showing that a nominal coding gain of 3 to 5 dB is easily obtained under reasonable decoding complexity and short packet length.

We believe that there is still much work to be done in this area. One direction for follow-up work would be the design and analysis of higher-layer scheduling algorithms for LNC schemes. Another direction would be the study of more general shaping methods beyond hypercube shaping. A third one would be the construction of more powerful LNC schemes. We believe that our algebraic framework can serve as a good basis for such development.

APPENDIX

A. Proof of Relation (14) for Example 5

The following two observations simplify the proof of the relation (14). First, it suffices to consider the case of $a = 2$, since the case of $a > 2$ is essentially the same. Second, it suffices to prove the relation for the $\mathbb{Z}$ -lattice partition Λ/Λ' , i.e.,

$$\mathbf{G}_{\Lambda'} = \text{diag}(\underbrace{p, \dots, p}_{k_1 - k_2}, \underbrace{p^2, \dots, p^2}_{k_2}) \mathbf{G}_\Lambda \quad (19)$$

due to the lift operation.

Next we construct two generator matrices $\mathbf{G}_\Lambda$ and $\mathbf{G}_{\Lambda'}$ satisfying the above relation.

First, let $\bar{\mathbf{g}}_i$ denote $\bar{\sigma}(\mathbf{g}_i)$, for $i = 1, \dots, n$. It is easy to see a basis of Λ is given by the vectors $\bar{\mathbf{g}}_1, \dots, \bar{\mathbf{g}}_{k_2}, p\bar{\mathbf{g}}_{k_2+1}, \dots, p\bar{\mathbf{g}}_{k_1}$, plus $n - k_1$ vectors of the shape $(0, \dots, 0, p^2, 0, \dots, 0)$. Moreover, these basis vectors have the following property: A vector $\mathbf{v}$ has a leading position i if $v_j = 0$, for $j = 1, \dots, i - 1$. Then these basis vectors have distinct leading positions. A generator matrix $\mathbf{G}_\Lambda$ can be constructed by using these basis vectors as rows.

Second, we claim that a basis of Λ' is given by $p^2\bar{\mathbf{g}}_1, \dots, p^2\bar{\mathbf{g}}_{k_1}$ plus the same $n - k_1$ vectors of the shape $(0, \dots, 0, p^2, 0, \dots, 0)$ as those for Λ . This is because these vectors have distinct leading positions and the elements in the leading positions are equal to p^2 . Similarly, a generator matrix $\mathbf{G}_{\Lambda'}$ can be constructed by using these basis vectors as rows.

By comparing these two bases for Λ and Λ' , we conclude that there indeed exist two generator matrices $\mathbf{G}_\Lambda$ and $\mathbf{G}_{\Lambda'}$ satisfying Relation (19), completing the proof.

B. Proof of Theorem 7

First, we upper bound the error probability $\Pr[\mathcal{D}_\Lambda(\mathbf{n}) \notin \Lambda']$. Consider the (non-lattice) set $\{\Lambda \setminus \Lambda'\} \cup \{\mathbf{0}\}$, i.e., the set difference $\Lambda \setminus \Lambda'$ adjoined with the zero vector. Let $\mathcal{R}_V(\mathbf{0})$ be the Voronoi region of $\mathbf{0}$ in the set $\{\Lambda \setminus \Lambda'\} \cup \{\mathbf{0}\}$, i.e.,

$$\mathcal{R}_V(\mathbf{0}) = \{\mathbf{x} \in \mathbb{C}^n : \|\mathbf{x} - \mathbf{0}\| \leq \|\mathbf{x} - \boldsymbol{\lambda}\|, \forall \boldsymbol{\lambda} \in \Lambda \setminus \Lambda'\}.$$

We have the following upper bound for $\Pr[\mathcal{D}_\Lambda(\mathbf{n}) \notin \Lambda']$.

Lemma 1: $\Pr[\mathcal{D}_\Lambda(\mathbf{n}) \notin \Lambda'] \leq \Pr[\mathbf{n} \notin \mathcal{R}_V(\mathbf{0})]$.

Proof:

$$\begin{aligned} \Pr[\mathbf{n} \in \mathcal{R}_V(\mathbf{0})] &= \Pr[\|\mathbf{n} - \mathbf{0}\| \leq \|\mathbf{n} - \boldsymbol{\lambda}\|, \forall \boldsymbol{\lambda} \in \Lambda \setminus \Lambda'] \\ &= \Pr[\|\mathbf{n} - \mathbf{0}\| < \|\mathbf{n} - \boldsymbol{\lambda}\|, \forall \boldsymbol{\lambda} \in \Lambda \setminus \Lambda']. \end{aligned}$$

Note that if $\|\mathbf{n} - \mathbf{0}\| < \|\mathbf{n} - \boldsymbol{\lambda}\|$ for all $\boldsymbol{\lambda} \in \Lambda \setminus \Lambda'$, then $\mathcal{D}_\Lambda(\mathbf{n}) \notin \Lambda \setminus \Lambda'$, as $\mathbf{0}$ is closer to $\mathbf{n}$ than any element in $\Lambda \setminus \Lambda'$. Thus,

$$\Pr[\mathbf{n} \in \mathcal{R}_V(\mathbf{0})] \leq \Pr[\mathcal{D}_\Lambda(\mathbf{n}) \notin \Lambda \setminus \Lambda'] = \Pr[\mathcal{D}_\Lambda(\mathbf{n}) \in \Lambda']. \quad \blacksquare$$

We further upper bound the probability $\Pr[\mathbf{n} \notin \mathcal{R}_V(\mathbf{0})]$. Let $\text{Nbr}(\Lambda \setminus \Lambda') \subseteq \Lambda \setminus \Lambda'$ denote the set of neighbors of $\mathbf{0}$ in $\Lambda \setminus \Lambda'$, i.e., $\text{Nbr}(\Lambda \setminus \Lambda')$ is the smallest subset of $\Lambda \setminus \Lambda'$ such that $\mathcal{R}_V(\mathbf{0})$ is given by

$$\mathcal{R}_V(\mathbf{0}) = \{\mathbf{x} \in \mathbb{C}^n : \|\mathbf{x} - \mathbf{0}\| \leq \|\mathbf{x} - \boldsymbol{\lambda}\|, \forall \boldsymbol{\lambda} \in \text{Nbr}(\Lambda \setminus \Lambda')\}.$$

Then we have

$$\begin{aligned} &P[\mathbf{n} \notin \mathcal{R}_V(\mathbf{0})] \\ &= P[\|\mathbf{n}\|^2 \geq \|\mathbf{n} - \boldsymbol{\lambda}\|^2, \text{ some } \boldsymbol{\lambda} \in \text{Nbr}(\Lambda \setminus \Lambda')] \\ &= P[\text{Re}\{\boldsymbol{\lambda}^H \mathbf{n}\} \geq \|\boldsymbol{\lambda}\|^2/2, \text{ some } \boldsymbol{\lambda} \in \text{Nbr}(\Lambda \setminus \Lambda')] \\ &\leq \sum_{\boldsymbol{\lambda} \in \text{Nbr}(\Lambda \setminus \Lambda')} P[\text{Re}\{\boldsymbol{\lambda}^H \mathbf{n}\} \geq \|\boldsymbol{\lambda}\|^2/2] \quad (20) \\ &\leq \sum_{\boldsymbol{\lambda} \in \text{Nbr}(\Lambda \setminus \Lambda')} \exp(-\nu \|\boldsymbol{\lambda}\|^2/2) E[\exp(\nu \text{Re}\{\boldsymbol{\lambda}^H \mathbf{n}\})], \forall \nu > 0 \quad (21) \end{aligned}$$

where (20) follows from the union bound and (21) follows from the Chernoff bound. From (8), we have

$$\begin{aligned} & E \left[\exp(\nu \operatorname{Re}\{\boldsymbol{\lambda}^H \mathbf{n}\}) \right] \\ &= E \left[\exp(\nu \operatorname{Re}\{\boldsymbol{\lambda}^H (\sum_{\ell} (\alpha h_{\ell} - a_{\ell}) \mathbf{x}_{\ell} + \alpha \mathbf{z})\}) \right] \\ &= E \left[\exp(\nu \operatorname{Re}\{\boldsymbol{\lambda}^H \alpha \mathbf{z}\}) \right] \\ &\quad \cdot \prod_{\ell} E \left[\exp(\nu \operatorname{Re}\{\boldsymbol{\lambda}^H (\alpha h_{\ell} - a_{\ell}) \mathbf{x}_{\ell}\}) \right] \end{aligned} \quad (22)$$

$$\begin{aligned} &= \exp\left(\frac{1}{4} \nu^2 \|\boldsymbol{\lambda}\|^2 |\alpha|^2 N_0\right) \\ &\quad \cdot \prod_{\ell} E \left[\exp(\nu \operatorname{Re}\{\boldsymbol{\lambda}^H (\alpha h_{\ell} - a_{\ell}) \mathbf{x}_{\ell}\}) \right] \end{aligned} \quad (23)$$

where (22) follows from the independence of $\mathbf{x}_1, \dots, \mathbf{x}_L, \mathbf{z}$ and (23) follows from the moment-generating function of a circularly symmetric complex Gaussian random vector.

Lemma 2: Let $\mathbf{x} \in \mathbb{C}^n$ be a complex random vector uniformly distributed over a hypercube $\gamma \mathbf{U} \mathcal{H}_n$ for some $\gamma > 0$ and some $n \times n$ unitary matrix. Then

$$E \left[\exp(\operatorname{Re}\{\mathbf{v}^H \mathbf{x}\}) \right] \leq \exp(\|\mathbf{v}\|^2 \gamma^2 / 24).$$

Proof: First, we consider a special case where the unitary matrix $\mathbf{U} = \mathbf{I}_n$. In this case, we have

$$\begin{aligned} & E \left[\exp(\operatorname{Re}\{\mathbf{v}^H \mathbf{x}\}) \right] \\ &= E \left[\exp(\operatorname{Re}\{\mathbf{v}\}^T \operatorname{Re}\{\mathbf{x}\} + \operatorname{Im}\{\mathbf{v}\}^T \operatorname{Im}\{\mathbf{x}\}) \right] \\ &= E \left[\exp\left(\sum_{i=1}^n (\operatorname{Re}\{\mathbf{v}_i\} \operatorname{Re}\{\mathbf{x}_i\} + \operatorname{Im}\{\mathbf{v}_i\} \operatorname{Im}\{\mathbf{x}_i\})\right) \right] \\ &= \prod_{i=1}^n E \left[\exp(\operatorname{Re}\{\mathbf{v}_i\} \operatorname{Re}\{\mathbf{x}_i\}) \right] E \left[\exp(\operatorname{Im}\{\mathbf{v}_i\} \operatorname{Im}\{\mathbf{x}_i\}) \right] \end{aligned} \quad (24)$$

$$= \prod_{i=1}^n \frac{\sinh(\operatorname{Re}\{\mathbf{v}_i\} \gamma / 2)}{\operatorname{Re}\{\mathbf{v}_i\} \gamma / 2} \frac{\sinh(\operatorname{Im}\{\mathbf{v}_i\} \gamma / 2)}{\operatorname{Im}\{\mathbf{v}_i\} \gamma / 2} \quad (25)$$

$$\begin{aligned} &\leq \prod_{i=1}^n \exp\left(\frac{(\operatorname{Re}\{\mathbf{v}_i\} \gamma)^2}{24}\right) \exp\left(\frac{(\operatorname{Im}\{\mathbf{v}_i\} \gamma)^2}{24}\right) \quad (26) \\ &= \exp\left(\frac{\gamma^2}{24} \|\mathbf{v}\|^2\right) \end{aligned}$$

where (24) follows from the independence among each real/imaginary component, (25) follows from the moment-generating function of a uniform random variable (note that both $\operatorname{Re}\{\mathbf{x}_i\}$ and $\operatorname{Im}\{\mathbf{x}_i\}$ are uniformly distributed over $[-\gamma/2, \gamma/2]$), and (26) follows from $\sinh(x)/x \leq \exp(x^2/6)$ (which can be obtained by simple Taylor expansion).

Then we consider a general unitary matrix $\mathbf{U}$. In this case, we have $\mathbf{x} = \mathbf{U} \mathbf{x}'$, where $\mathbf{x}' \in \gamma[-1/2, 1/2]^{2n}$, i.e., both $\operatorname{Re}\{\mathbf{x}'_i\}$ and $\operatorname{Im}\{\mathbf{x}'_i\}$ are uniformly distributed over

$[-\gamma/2, \gamma/2]$. Hence,

$$\begin{aligned} E \left[\exp(\operatorname{Re}\{\mathbf{v}^H \mathbf{x}\}) \right] &= E \left[\exp(\operatorname{Re}\{\mathbf{v}^H \mathbf{U} \mathbf{x}'\}) \right] \\ &= E \left[\exp(\operatorname{Re}\{(\mathbf{U}^H \mathbf{v})^H \mathbf{x}'\}) \right] \\ &\leq \exp\left(\frac{\gamma^2}{24} \|\mathbf{U}^H \mathbf{v}\|^2\right) \\ &= \exp\left(\frac{\gamma^2}{24} \|\mathbf{v}\|^2\right) \end{aligned}$$

Note that $P = \frac{1}{n} E[\|\mathbf{x}_{\ell}\|^2] = \gamma^2/6$. Thus, we have

$$\begin{aligned} & E \left[\exp(\nu \operatorname{Re}\{\boldsymbol{\lambda}^H \mathbf{n}\}) \right] \\ &\leq \exp\left(\frac{1}{4} \nu^2 \|\boldsymbol{\lambda}\|^2 |\alpha|^2 N_0\right) \prod_{\ell} \exp(\|\nu \boldsymbol{\lambda} (\alpha h_{\ell} - a_{\ell})\|^2 P/4) \\ &= \exp\left(\frac{1}{4} \nu^2 \|\boldsymbol{\lambda}\|^2 |\alpha|^2 N_0 + \|\nu \boldsymbol{\lambda}\|^2 \|\alpha \mathbf{h} - \mathbf{a}\|^2 P/4\right) \\ &= \exp\left(\frac{1}{4} \|\boldsymbol{\lambda}\|^2 \nu^2 N_0 Q(\alpha, \mathbf{a})\right), \end{aligned}$$

where the quantity $Q(\alpha, \mathbf{a})$ is given by

$$Q(\alpha, \mathbf{a}) = |\alpha|^2 + \text{SNR} \|\alpha \mathbf{h} - \mathbf{a}\|^2$$

and $\text{SNR} = P/N_0$.

It follows that, for all $\nu > 0$,

$$\begin{aligned} & \Pr[\mathbf{n} \notin \mathcal{R}_V(\mathbf{0})] \\ &\leq \sum_{\boldsymbol{\lambda} \in \text{Nbr}(\Lambda \setminus \Lambda')} \exp\left(-\nu \|\boldsymbol{\lambda}\|^2 / 2 + \frac{1}{4} \|\boldsymbol{\lambda}\|^2 \nu^2 N_0 Q(\alpha, \mathbf{a})\right). \end{aligned}$$

Choosing $\nu = 1/(N_0 Q(\alpha, \mathbf{a}))$, we have

$$\Pr[\mathbf{n} \notin \mathcal{R}_V(\mathbf{0})] \leq \sum_{\boldsymbol{\lambda} \in \text{Nbr}(\Lambda \setminus \Lambda')} \exp\left(-\frac{\|\boldsymbol{\lambda}\|^2}{4 N_0 Q(\alpha, \mathbf{a})}\right).$$

For high signal-to-noise ratios, we have

$$\sum_{\boldsymbol{\lambda} \in \text{Nbr}(\Lambda \setminus \Lambda')} \exp\left(-\frac{\|\boldsymbol{\lambda}\|^2}{4 N_0 Q(\alpha, \mathbf{a})}\right) \approx K(\Lambda/\Lambda') \exp\left(-\frac{d^2(\Lambda/\Lambda')}{4 N_0 Q(\alpha, \mathbf{a})}\right).$$

Therefore, we have

$$\begin{aligned} \Pr[\mathcal{D}_{\Lambda}(\mathbf{n}) \notin \Lambda'] &\leq \Pr[\mathbf{n} \notin \mathcal{R}_V(\mathbf{0})] \\ &\approx K(\Lambda/\Lambda') \exp\left(-\frac{d^2(\Lambda/\Lambda')}{4 N_0 Q(\alpha, \mathbf{a})}\right), \end{aligned}$$

completing the proof of Theorem 7.

C. Proof of Theorem 8

First, we show the existence of the solution $\{\mathbf{a}_1, \dots, \mathbf{a}_m\}$ by induction on m .

If $m = 1$, then the vector $\mathbf{a}_1$ can be chosen such that $\mathbf{a}_1 \mathbf{L}$ is one of the shortest lattice points. Note that $\mathbf{a}_1$ is not divisible by π ; otherwise it will not be one of the shortest lattice points. In other words, $\bar{\mathbf{a}}_1$ is indeed nonzero. Hence, the solution $\mathbf{a}_1$ always exists when $m = 1$.

Now suppose the solution $\{\mathbf{a}_1, \dots, \mathbf{a}_k\}$ exists when $k < m$. We will show the existence of the vector $\mathbf{a}_{k+1}$.

Consider the following set

$$\mathcal{B} = \{\mathbf{b} \in R^L : \bar{\mathbf{b}}, \bar{\mathbf{a}}_1, \dots, \bar{\mathbf{a}}_k \text{ are linearly independent}\}.$$

Clearly, the set $\mathcal{B}$ is nonempty, since $k < m$. Choose an element $\mathbf{b}$ from the set $\mathcal{B}$ and construct a new set $\mathcal{S}$ as

$$\mathcal{S} = \{\mathbf{a} \in R^L : \|\mathbf{a}\mathbf{L}\| \leq \|\mathbf{b}\mathbf{L}\|, \\ \bar{\mathbf{a}}, \bar{\mathbf{a}}_1, \dots, \bar{\mathbf{a}}_k \text{ are linearly independent}\}.$$

Clearly, $\mathcal{S}$ is a nonempty set of finite elements. Then the vector $\mathbf{a}_{k+1}$ can be chosen as

$$\mathbf{a}_{k+1} = \arg \min_{\mathbf{a} \in \mathcal{S}} \|\mathbf{a}\mathbf{L}\|.$$

This proves the existence of the vector $\mathbf{a}_{k+1}$, which completes the induction.

Second, we show that the solution $\{\mathbf{a}_1, \dots, \mathbf{a}_m\}$ is a dominated solution by induction on m .

If $m = 1$, then $\|\mathbf{a}_1\mathbf{L}\| \leq \|\mathbf{b}_1\mathbf{L}\|$ for any feasible solution $\mathbf{b}_1$, since $\mathbf{a}_1\mathbf{L}$ is one of the shortest lattice points.

Now suppose that $\{\mathbf{a}_1, \dots, \mathbf{a}_k\}$ is a dominated solution when $k < m$. We will show that $\{\mathbf{a}_1, \dots, \mathbf{a}_k, \mathbf{a}_{k+1}\}$ is also a dominated solution.

Consider a feasible solution $\{\mathbf{b}_1, \dots, \mathbf{b}_k, \mathbf{b}_{k+1}\}$ with $\|\mathbf{b}_1\mathbf{L}\| \leq \dots \leq \|\mathbf{b}_{k+1}\mathbf{L}\|$. Since $\bar{\mathbf{b}}_1, \dots, \bar{\mathbf{b}}_k$ are linearly independent, we have

$$\|\mathbf{a}_i\mathbf{L}\| \leq \|\mathbf{b}_i\mathbf{L}\|, \quad i = 1, \dots, k.$$

It remains to show $\|\mathbf{a}_{k+1}\mathbf{L}\| \leq \|\mathbf{b}_{k+1}\mathbf{L}\|$. We consider the following two cases.

- 1) If there exists some $\mathbf{b}_i$ ($i = 1, \dots, k+1$) such that $\bar{\mathbf{b}}_i, \bar{\mathbf{a}}_1, \dots, \bar{\mathbf{a}}_k$ are linearly independent, then by the construction of $\mathbf{a}_{k+1}$, we have

$$\|\mathbf{a}_{k+1}\mathbf{L}\| \leq \|\mathbf{b}_i\mathbf{L}\| \leq \|\mathbf{b}_{k+1}\mathbf{L}\|.$$

- 2) Otherwise, each $\bar{\mathbf{b}}_i$ can be expressed as a linear combination of $\bar{\mathbf{a}}_1, \dots, \bar{\mathbf{a}}_k$. That is,

$$\bar{\mathbf{b}}_i \in \text{Span}\{\bar{\mathbf{a}}_1, \dots, \bar{\mathbf{a}}_k\}, \quad \forall i = 1, \dots, k+1.$$

This is contrary to the fact that $\bar{\mathbf{b}}_1, \dots, \bar{\mathbf{b}}_{k+1}$ are linearly independent, since any $k+1$ vectors in a vector space of dimension k are linearly dependent.

Therefore, we have $\|\mathbf{a}_{k+1}\mathbf{L}\| \leq \|\mathbf{b}_{k+1}\mathbf{L}\|$, which completes the induction.

D. Proof of Proposition 4

Note that the nominal coding gain $\gamma_c(\Lambda_C/\Lambda'_C)$ is invariant to scaling. Hence, we may assume, without loss of generality, that the lattice partition Λ_C/Λ'_C is used instead of its scaled version.

First, we will show that

$$d^2(\Lambda_C/\Lambda'_C) = w_E^{\min}(\mathcal{C}). \quad (27)$$

Recall that $d(\Lambda_C/\Lambda'_C)$ is the length of the shortest vectors in the set difference $\Lambda_C \setminus \Lambda'_C$. Hence, we have

$$d(\Lambda_C/\Lambda'_C) = \min_{\mathbf{c} \neq \mathbf{0}} \|\langle \mathbf{c} \rangle\|.$$

It follows that $d^2(\Lambda_C/\Lambda'_C) = \min_{\mathbf{c} \neq \mathbf{0}} \|\langle \mathbf{c} \rangle\|^2 = w_E^{\min}(\mathcal{C})$.

Second, we will show that

$$V(\Lambda) = |\pi|^{2(n-k)}. \quad (28)$$

Note that $V(\Lambda') = |\pi|^{2n}$ and $V(\Lambda')/V(\Lambda) = |\pi|^{2k}$. Hence, we have $V(\Lambda) = |\pi|^{2(n-k)}$.

Combining (27) and (28), we have $\gamma_c(\Lambda_C/\Lambda'_C) = w_E^{\min}(\mathcal{C})/|\pi|^{2(1-k/n)}$, which completes the proof.

E. Modified Viterbi Decoder for Example 7

We will show that the NLP decoder $\mathcal{D}_{\Lambda_C}$ can be implemented through a modified Viterbi decoder.

First, note that the NLP decoder $\mathcal{D}_{\Lambda_C}$ solves the following optimization problem

$$\begin{aligned} & \text{minimize} \quad \|\boldsymbol{\lambda} - \alpha \mathbf{y}\| \\ & \text{subject to} \quad \boldsymbol{\lambda} \in \Lambda_C \end{aligned} \quad (29)$$

Second, note that the problem (29) is equivalent to

$$\begin{aligned} & \text{minimize} \quad \|\langle \mathbf{c} \rangle + \boldsymbol{\lambda}' - \alpha \mathbf{y}\| \\ & \text{subject to} \quad \mathbf{c} \in \mathcal{C} \\ & \quad \quad \boldsymbol{\lambda}' \in \Lambda'_C \end{aligned} \quad (30)$$

This is because each lattice point $\boldsymbol{\lambda} \in \Lambda_C$ can be decomposed as $\boldsymbol{\lambda} = \langle \mathbf{c} \rangle + \boldsymbol{\lambda}'$, where $\mathbf{c} = \sigma(\boldsymbol{\lambda})$ and $\boldsymbol{\lambda}' \in \Lambda'_C$.

Third, note that Problem (30) is equivalent to

$$\begin{aligned} & \text{minimize} \quad \|[\langle \mathbf{c} \rangle - \alpha \mathbf{y}] \bmod \Lambda'_C\| \\ & \text{subject to} \quad \mathbf{c} \in \mathcal{C} \end{aligned} \quad (31)$$

where $[\mathbf{x}] \bmod \Lambda'_C$ is defined as $[\mathbf{x}] \bmod \Lambda'_C \triangleq \mathbf{x} - \mathcal{D}_{\Lambda'_C}(\mathbf{x})$. This is because $\boldsymbol{\lambda}' = -\mathcal{D}_{\Lambda'_C}(\langle \mathbf{c} \rangle - \alpha \mathbf{y})$ solves Problem (30) for any $\mathbf{c} \in \mathcal{C}$.

Now it is easy to see the problem (31) can be solved through a modified Viterbi decoder with the metric given by $\|[\cdot] \bmod \Lambda'_C\|$ instead of $\|\cdot\|$. Therefore, the NLP decoder $\mathcal{D}_{\Lambda_C}$ can be implemented through a modified Viterbi decoder.

REFERENCES

- [1] R. Ahlswede, N. Cai, S.-Y. R. Li, and R. W. Yeung, "Network information flow," *IEEE Trans. Inf. Theory*, vol. 46, no. 4, pp. 1204–1216, Jul. 2000.
- [2] S.-Y. R. Li, R. W. Yeung, and N. Cai, "Linear network coding," *IEEE Trans. Inf. Theory*, vol. 49, no. 2, pp. 371–381, Feb. 2003.
- [3] R. Koetter and M. Médard, "An algebraic approach to network coding," *IEEE/ACM Trans. Netw.*, vol. 11, no. 5, pp. 782–795, Oct. 2003.
- [4] S. Zhang, S.-C. Liew, and P. P. Lam, "Hot topic: Physical layer network coding," in *Proc. of ACM Int. Conf. on Mobile Compu. and Netw.*, Los Angeles, CA, USA, Sep. 24–29, 2006, pp. 358–365.
- [5] P. Popovski and H. Yomo, "The anti-packets can increase the achievable throughput of a wireless multi-hop network," in *Proc. of IEEE Int. Conf. on Commun.*, Istanbul, Turkey, Jun. 11–15, 2006, pp. 3885–3890.
- [6] B. Nazer and M. Gastpar, "Computing over multiple-access channels with connections to wireless network coding," in *Proc. of IEEE Int. Symp. on Inf. Theory*, Seattle, USA, Jul. 9–14, 2006, pp. 1354–1358.
- [7] P. Popovski and H. Yomo, "Physical network coding in two-way wireless relay channels," in *Proc. of IEEE Int. Conf. on Commun.*, Glasgow, Scotland, Jun. 24–28, 2007, pp. 707–712.
- [8] T. Koike-Akino, P. Popovski, and V. Tarokh, "Optimized constellations for two-way wireless relaying with physical network coding," *IEEE J. Sel. Areas Commun.*, vol. 27, no. 5, pp. 773–787, Jun. 2009.
- [9] M. P. Wilson, K. Narayanan, H. D. Pfister, and A. Sprintson, "Joint physical layer coding and network coding for bidirectional relaying," *IEEE Trans. Inf. Theory*, vol. 56, no. 11, pp. 5641–5654, Nov. 2010.
- [10] W. Nam, S.-Y. Chung, and Y. H. Lee, "Capacity bounds for two-way relay channels," in *Proc. of Int. Zurich Seminar on commun.*, Zurich, Switzerland, Mar. 12–14, 2008.

- [11] A. S. Avestimehr, A. Sezgin, and D. N. C. Tse, "Capacity of the two-way relay channel within a constant gap," *Eur. Trans. Telecomm.*, vol. 21, no. 4, pp. 363–374, Jun. 2010.
- [12] S. Katti, S. Gollakota, and D. Katabi, "Embracing wireless interference: Analog network coding," in *Proc. of ACM Special Interest Group on Data Commun.*, Kyoto, Japan, Aug. 27–31, 2007.
- [13] P. Popovski and T. Koike-Akino, "Coded bidirectional relaying in wireless networks," in *New Directions in Wireless Communications Research*, V. Tarokh, Ed. Springer, 2009, pp. 291–316.
- [14] B. Nazer and M. Gastpar, "Compute-and-forward: Harnessing interference through structured codes," *submitted to IEEE Trans. Inf. Theory*, Aug. 2009.
- [15] U. Erez and R. Zamir, "Achieving $\frac{1}{2} \log(1 + \text{SNR})$ on the awgn channel with lattice encoding and decoding," *IEEE Trans. Inf. Theory*, vol. 50, no. 10, pp. 2293–2314, Oct. 2004.
- [16] M. P. Wilson and K. R. Narayanan, "Power allocation strategies and lattice based coding schemes for bi-directional relaying," in *Proc. of IEEE Int. Symp. on Inf. Theory*, Coex, Seoul, Korea, Jun. 28 – Jul. 3, 2009, pp. 344–348.
- [17] U. Niesen and P. Whiting, "The degrees of freedom of compute-and-forward," *submitted to IEEE Trans. Inf. Theory*, Jan. 2011.
- [18] J. Zhan, B. Nazer, M. Gastpar, and U. Erez, "MIMO compute-and-forward," in *Proc. of IEEE Int. Symp. on Inf. Theory*, Seoul, South Korea, Jun. 28– Jul. 3, 2009, pp. 2848–2852.
- [19] J.-C. Belfiore and M. A. V. Castro, "Managing interference through space-time codes, lattice reduction and network coding," in *IEEE Inf. Workshop*, Cairo, Egypt, Jan. 6–8, 2010, pp. 1–5.
- [20] B. Nazer and M. Gastpar, "Reliable physical layer network coding," *Proc. IEEE*, vol. 99, no. 3, pp. 438–460, Mar. 2011.
- [21] A. S. Avestimehr, S. N. Diggavi, and D. N. C. Tse, "Wireless network information flow: A deterministic approach," *IEEE Trans. Inf. Theory*, vol. 57, no. 4, pp. 1872–1905, Apr. 2011.
- [22] S. H. Lim, Y.-H. Kim, A. E. Gamal, and S.-Y. Chung, "Noisy network coding," 2010, <http://arxiv.org/abs/1002.3188>.
- [23] A. Özgür and S. N. Diggavi, "Approximately achieving Gaussian relay network capacity with lattice codes," in *Proc. of IEEE Int. Symp. on Inf. Theory*, Austin, Texas, USA, Jun. 13–18, 2010, pp. 669–673.
- [24] R. Köter and F. R. Kschischang, "Coding for errors and erasures in random network coding," *IEEE Trans. Inf. Theory*, vol. 54, no. 8, pp. 3579–3591, Aug. 2008.
- [25] O. Shalvi, N. Sommer, and M. Feder, "Signal codes: Convolutional lattice codes," *IEEE Trans. Inf. Theory*, to appear, 2011.
- [26] C. Feng, D. Silva, and F. R. Kschischang, "Lattice network coding via signal codes," in *Proc. of IEEE Int. Symp. on Inf. Theory*, Saint Petersburg, Russia, Jul. 31– Aug. 5, 2011.
- [27] B. R. McDonald, *Linear Algebra over Commutative Rings*. New York: Marcel Dekker, 1984.
- [28] D. S. Dummit and R. M. Foote, *Abstract Algebra*, 3rd ed. John Wiley & Sons, Inc., 2004.
- [29] W. C. Brown, *Matrices over Commutative Rings*. New York: Marcel Dekker, 1986.
- [30] J. Zhan, B. Nazer, U. Erez, and M. Gastpar, "Integer-forcing linear receivers," in *Proc. of IEEE Int. Symp. on Inf. Theory*, Austin, Texas, USA, Jun. 13–18, 2010, pp. 1022–1026.
- [31] J. Zhan, B. Nazer, O. Ordentlich, U. Erez, and M. Gastpar, "Integer-forcing architectures for MIMO: Distributed implementation and SIC," in *Proc. of the 44th Ann. Asilomar Conf. on Signals, Syst., and Compu.*, Monterey, CA, USA, Oct. 2010, pp. 322–326.
- [32] J. H. Conway and N. Sloane, "A fast encoding method for lattice codes and quantizers," *IEEE Trans. Inf. Theory*, vol. 29, no. 6, pp. 820–824, Nov. 1983.
- [33] G. D. Forney, Jr., "Multidimensional constellations—part II: Voronoi constellations," *IEEE J. Sel. Areas Commun.*, vol. 7, no. 6, pp. 941–958, Aug. 1989.
- [34] R. Zamir and M. Feder, "On lattice quantization noise," *IEEE Trans. Inf. Theory*, vol. 42, no. 4, pp. 1152–1159, Jul. 1996.
- [35] J. H. Conway and N. J. A. Sloane, *Sphere Packings, Lattices and Groups*, 3rd ed. New York: Springer-Verlag, 1999.
- [36] U. Erez, S. Litsyn, and R. Zamir, "Lattices which are good for (almost) everything," *IEEE Trans. Inf. Theory*, vol. 51, no. 10, pp. 3401–3416, Oct. 2005.
- [37] M.-R. Sadeghi, A. H. Banihashemi, and D. Panario, "Low-density parity-check lattices: Construction and decoding analysis," *IEEE Trans. Inf. Theory*, vol. 52, no. 10, pp. 4481–4495, Oct. 2006.
- [38] N. Sommer, M. Feder, and O. Shalvi, "Low density lattice codes," *IEEE Trans. Inf. Theory*, vol. 54, no. 4, pp. 1561–1585, Apr. 2008.
- [39] —, "Shaping methods for low-density lattice codes," in *IEEE Inf. Workshop*, Taormina, Sicily, Italy, Oct. 11–16, 2009, pp. 238–242.
- [40] J. W. S. Cassels, *An Introduction to the Geometry of Numbers*. Springer-Verlag, 1971.
- [41] Y. H. Gan, C. Ling, and W. H. Mow, "Complex lattice reduction algorithm for low-complexity full-diversity MIMO detection," *IEEE Trans. Signal Process.*, vol. 57, no. 7, pp. 2701 – 2710, Jul. 2009.
- [42] H. Yao and G. W. Wornell, "Lattice-reduction-aided detectors for MIMO communication systems," in *Proc. of IEEE Global Commun. Conf.*, Taipei, Taiwan, R.O.C., Nov. 17–21, 2002, pp. 424–428.
- [43] O. Ordentlich and U. Erez, "Achieving the gains promised by integer-forcing equalization with binary codes," in *Proc. of 26th Convention of Electr. and Electron. Eng. in Israel*, Eilat, Israel, Nov. 2010, pp. 703–707.